

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 160 095 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.12.2001 Bulletin 2001/49

(51) Int Cl.7: **B41M 5/36, B41C 1/10,
G03F 7/00**

(21) Application number: **01112829.5**

(22) Date of filing: **30.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **30.05.2000 JP 2000160323**
20.06.2000 JP 2000184603
04.09.2000 JP 2000266797

(71) Applicant: **FUJI PHOTO FILM CO., LTD.**
Kanagawa-ken (JP)

(72) Inventors:
• **Shimada, Kazuto**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)
• **Sorori, Tadahiro**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)
• **Kodama, Kunihiko**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **Heat-sensitive composition and planographic printing plate precursor**

(57) A heat-sensitive composition comprising a compound of a specific general formula which gener-

ates an acid or radical when heated, and a compound whose physical and chemical properties are irreversibly changed by an acid or radical.

EP 1 160 095 A2

Description

BACKGROUND OF THE INVENTION

Field of invention

[0001] The present invention relates to a heat-sensitive composition which can be applied widely as a heat-sensitive recording material, and a planographic printing plate having a negative recording layer obtained by using the above-mentioned composition, the plate being writable by infrared laser and being highly sensitive, and image portions of the recording layer being excellent in alkali developing-resistance and printing-endurance.

Description of the Related Art

[0002] Recent development of laser is remarkable, and particularly, in solid laser and semiconductor laser having light-emitting ranges in a range from near infrared ray to infrared ray, output is increasing and size is decreasing. Therefore, these lasers are very useful as an exposure light source in producing a printing plate directly from digital data of computers and the like.

[0003] The above-mentioned negative planographic printing plate material for infrared laser using, as an exposure light source, infrared laser having an emitting range in an infrared range is a planographic printing material having a photosensitive layer containing a light-heat converting agent, a polymerization initiator generating a radical by light or heat, and a polymerizable compound.

[0004] Usually, such a negative image recording material utilizes a recording method in which a polymerization reaction is caused by using a radical generated by light or heat as an initiator, and where in exposed portions of a recording layer are hardened to form image portions. Such a negative image forming material has lower image forming property as compared with a positive material in which a recording layer is solubilized by energy of infrared laser irradiation, and forms strong image portions by promoting a hardening reaction by polymerization, therefore, heating treatment is usually conducted before a developing process when the negative image forming material is used. Examples of the negative image recording material which is subjected to such post heating treatment include, recording materials composed of a resol resin and novolak resin described in US 5,340,699 and the like, as well as other materials.

[0005] Particularly when an aluminum substrate is used, there is a problem that energy by infrared laser irradiation is diffused in the substrate having high heat conductivity, and is not used for promotion and initiation of a polymerization reaction to form images, consequently, sufficient sensitivity is not obtained.

SUMMARY OF THE INVENTION


[0006] The present invention has been accomplished in view of the above-mentioned problems, and an object of the present invention is to provide a heat-sensitive composition in which highly sensitive substance can be changed irreversibly by heating, and a negative planographic printing plate which is obtained by using the above-mentioned composition which has high sensitivity, requires no heating treatment before development or in which the heating treatment can be simplified, has image portions excellent in alkali development-resistance and printing-endurance, and can be written by heat mode.

[0007] The present inventors have done intensive research, and found that a composition having excellent hardening property and color developing property due to exposure to heat is obtained by including an acid/radical generator having the following general formula (A), general formula (B), general formula (C), general formula (D) or general formula (E), and a whose physical properties are irreversible by an acid or radical, and further that increase in sensitivity of recording and improvement of printing endurance of a planographic printing plate can be attained by providing a recording layer containing such a composition. This discovery led to the present invention.


[0008] Namely, a heat-sensitive composition comprising (I) a compound which generates an acid or a radical when heated and which has the following general formula (A), general formula (B), general formula (C), general formula (D) or general formula (E), and (II) a compound whose physical and chemical properties are changed irreversibly by an acid or radical



General formula (A)



General formula (B)



General formula (C)












General formula (D)




General formula (E)

wherein, in general formula (A), ${}^a\text{M}^+$ represents a monovalent cation; ${}^a\text{X}$ represents one of the groups shown below or a halogen atom;



and in the formula, R^1 and R^2 may be the same or different and represent a monovalent non-metal atom, in the general formula (B), ${}^b\text{Y}$ has the same definition as for ${}^a\text{X}$ in the general formula (A) or represents $-\text{OH}$, $-\text{CN}$, $-\text{NO}_2$, $-\text{Si}(\text{R}^5)(\text{R}^6)(\text{R}^7)$; R^3 to R^7 may be the same or different and represent a monovalent non-metal atom; and ${}^b\text{M}^+$ represents a monovalent cation, in the general formula (C), R^8 represents a monovalent non-metal atom; Ar^1 and Ar^2 may be the same or different and represent an aryl group; and ${}^c\text{M}^+$ represents a monovalent cation, in the general formula (D), ${}^d\text{R}$ represents an alkyl group or aryl group; and ${}^d\text{M}^+$ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium, in the general formula (E), ${}^e\text{X}^-$ is an anion of a compound having a structure of the following general formula (F);



General formula (F)

in the formula, FY represents a single bond, -CO- or -SO₂-; each of R^a and R^b independently represents a linear, branched or cyclic alkyl group, aryl group, aralkyl group or camphor group; R^a and R^b may be connected via an alkylene group, arylene group or aralkyl group to form a ring; when FY is a -CO-group, R^b may be a hydroxyl group or alkoxy group;

and, ^eM⁺ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium.

[0009] When this composition further contains the heat-sensitive composition according to Claim 1 wherein, the composition further comprises (III) a light-heat converting agent, and by exposure in the absorption wavelength of said (III) a light-heat converting agent, an acid or radical of a compound (I) generating an acid or radical by being heated which is represented by at least one of the above-mentioned general formulae (A) to general formula (E) is generated, and there are changed in physical or chemical properties of compound (II) whose physical or chemical properties are changed irreversibly by an acid or radical leading to possibility of recording by exposure.

[0010] Further, the planographic printing plate disclosed by the present invention can realize recording by heat mode exposure, and comprises a substrate having disposed thereon a photosensitive layer containing (I) an acid/radical polymerization initiator represented by at least one of the above-mentioned general formula (A) to general formula (E), (III) a light-heat converting agent, (II-a) a radical-polymerizable compound having an unsaturated bond, and (IV) a binder polymer.

[0011] In the present invention, "heat mode applicable" means that recording by heat mode exposure is possible. The definition of the heat mode exposure in the present invention will be explained in detail. As described in Hans-Joachim Timpe, IS&Ts NIP 15: 1999 International Conference on Digital Printing Technologies, P. 209, it is known that process which starts with the light-excitation of a light-absorbing substance (for example, a colorant) in a photosensitive material and the resulting chemical or physical change, and is followed by image formation which is caused by said light excitation and resulting chemical or physical changes, is of mainly two modes. One is a so-called photon mode in which a light absorbing substance which has been light-excited is deactivated by certain photochemical mutual action (for example, energy transfer, electron movement) with other reactive substance in a photosensitive material, and a consequently deactivated reactive substance causes chemical or physical change necessary for the above-mentioned image formation. Another is a so-called heat mode in which a light absorbing substance which has been light-excited generates heat and is de-activated, and a reactive substance causes chemical or physical change necessary for the above-mentioned image formation by utilizing this heat. Other models include, special modes such as abrasion in which substances are explosively spattered by light energy locally concentrated, multi-photon absorption in which one molecule absorbs a large number of photons at one time, and the like, however, these modes are omitted in this specification.

[0012] An exposure process utilizing each of the above-mentioned modes is called photon mode exposure and heat mode exposure respectively. The technical difference between the photon mode exposure and the heat mode exposure is with respect whether or not the amount of energy of the photons which are exposed can be added to amount of energy of the desired reaction. For example, consider the case where using n photons causes a certain reaction. In the photo mode, because the photons have photochemical action upon each other, the energy of one photon can not be added to the total amount of energy of the reaction according to the law of conservation of energy and the law of conservation of quantum momentum. Namely, to cause a particular reaction, the relation: "energy amount of one photon ≥ energy amount of reaction" is necessary. On the other hand, in the heat mode exposure, it is possible to add energy amount, since heat is generated after light-excitation and light energy is converted into heat and utilized. Therefore, the relation: "energy amount of n photons ≥ energy amount of reaction" is sufficient. However, this addition of energy amount is limited by thermal diffusion. Namely, if the next light-excitation-deactivation process occurs and heat is generated by the time heat escapes due to thermal diffusion from the exposed portion (reaction point) being examined, then accumulation of the heat is ensured, leading to increase in temperature at this portion. However, when the next generation of heat is delayed, heat escapes and does not accumulate. That is, in heat mode radiation, even if the total amount of exposure energy is the same, results are different when light having high energy is radiated for a short period of time, than when light having low energy is radiated for a long period of time, and the former is advantageous with respect to accumulation of heat.

[0013] Of course, although there may be cases where a similar phenomenon occur due to the effect of diffusion of material from subsequent reactions, generally speaking, this phenomenon does not occur in photo mode exposure.

[0014] Namely, from the standpoint of properties of a photosensitive material, inherent sensitivity of a photosensitive material (energy amount for reaction required to form image) is constant with respect to exposure power density (w/cm^2) (=energy density per unit time) in the photon mode, while in the heat mode, the inherent sensitivity of a photosensitive material increases with respect to the exposure power density. Accordingly, if when being actually used as a image recording material the exposure time is set such that productivity is maintained, when the two modes are compared, it is found that in photo mode exposure, a high sensitivity of 0.1 mJ/cm^2 is usually achieved. However since the reaction occurred even when the exposure amount was extremely low, there was a problem of low exposure fogging at non-exposed portions. On the other hand, in the heat mode exposure, a reaction occurs only at exposure amount of certain level or more, and exposure amount of about 50 mJ/cm^2 is usually necessary in view of thermal stability of a photosensitive material, however, the problem of low exposure fogging is avoided.

[0015] Thus, in the actual heat mode exposure, exposure power density on the surface of a photosensitive material of 5000 w/cm^2 or more, preferably 10000 w/cm^2 or more, is necessary. Laser having high power density of $5.0 \times 10^5 / \text{cm}^2$ or more is not described in detail but its use is not preferable due to problems such as occurrence of abrasion, staining of a light source, and the like.

[0016] Though the working of the present invention is not clear, (I) an acid/radical generating agent of the general formulae (A) to (E) included in the heat-sensitive composition of the present invention is a compound having a carboxylate or sulfonamide structure in a counter anion in an onium salt structure, and has lower thermal decomposition temperature and higher sensitivity than a compound having a sulfonate ($-\text{SO}_3^-$) or inorganic salt (PF_6^- , SbF_6^- , BF_4^-) as a counter anion generally used as a radical polymerization initiator.

[0017] Particularly in the case of a compound having a carboxylate, such as those represented by the general formulae (A) to (C), though the reaction mechanism is not definite, it is supposed that by action of heat generated in decomposition of an acid/radical generating agent, a carboxylic acid in a counter anion causes decarboxylation, and an acid or radical is generated not only from a mother nucleus of a sulfonium salt but also from the counter anion side, leading to high sensitivity.

[0018] The structure causing decarboxylation easily is a structure in which bond dissociation energy between a carboxyl group and a R group of R-COO^- is low, or a structure in which pK_a of R-H which is a hydrogenated body of a R part of a R-COO^- structure is low, for example, pK_a is lower than that of a hydrogenated body of methane ($\text{CH}_3\text{-H}$). Further, regarding the temperature at which decarboxylation is conducted, it is preferable that decarboxylation is caused at a temperature of 250°C or less, preferably 230°C or less, further preferably 215°C or less.

[0019] Further, an acid generated in decomposition has lower permeability in alkaline water than a carboxylic acid or carbon dioxide, namely, a compound which is relatively weak acid, and is effective for promotion and initiation of polymerization, and generates a strong acid such as a sulfonic acid and the like, therefore, it is supposed that when this composition is used as a recording layer of a planographic printing plate, damage by an alkaline developer in developing is small, and the film strength of image portion increases, consequently, printing endurance increases.

[0020] It has been found that a composition manifesting high sensitivity to heat or exposure and excellent in thermosetting property is obtained by combining an acid/radical generating agent in the present invention with a compound manifesting irreversible change in physical or chemical properties, because of the above-mentioned action.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0021] The present invention will be illustrated in detail below.


[0022] In the heat-sensitive composition of the present invention, because of inclusion of (I) an acid/radical generating agent of the general formulae (A) to (E) and (II) a compound which manifests irreversible change in physical and chemical properties by an acid or radical, the acid/radical generating agent (I) of the general formulae (A) to (E) is decomposed, by heat, to generate an acid or radical, and the physical and chemical properties of the compound (II) which manifests irreversible change in physical and chemical properties by an acid or radical are changed by the generated acid or radical, to cause a hardening reaction, color development reaction, decoloring reaction and the like by radical polymerization. When this heat-sensitive composition further contains (III) a light-heat converting agent, by irradiation with light having a wavelength of this light-heat converting agent, for example, infrared laser and the like, the light-heat converting agent (III) generates heat, the acid/radical generating agent (I) of the general formulae (A) to (E) is decomposed by heat of the infrared laser light itself or heat generated by the light-heat converting agent (III), to generate an acid or radical, causing change in properties of the compound (II) which manifests irreversible change in physical and chemical properties by an acid or radical.

(I) Compound generating acid/radical of the general formulae (A) to (E)


[0023] The acid/radical generating agent used in the present invention is represented by the following general formulae (A) to (E).



General formula (A)




General formula (B)



General formula (C)












General formula (D)



General formula (E)

[0024] In the formula (A), ${}^a\text{X}$ represents one of the groups shown below or a halogen atom;



and in the formula, R^1 and R^2 may be the same or different and represent a monovalent non-metal atom.

[0025] R^1 and R^2 preferably represent hydrogen, alkyl group, alkenyl group or alkynyl group, or aryl group, cycloalkyl group, cycloalkenyl group, cycloalkynyl group having 1 to 20 carbon atom, or alkoxy group having 1 to 10 carbon atoms, and these may be substituted with one or more of halogen atoms, carbonyl groups, alkoxy groups, ester groups, thioether groups, amide groups, imide groups, hydroxyl group, nitro group, cyano group, thiocarbonyl groups, amino

groups, sulfonate groups, sulfoxide groups, aryl groups, silyl group and the like.



[0026] From the standpoint of sensitivity, an alkyl group, alkenyl group or aryl group having 1 to 12 carbon atoms are preferable.

[0027] Preferable aryl groups include phenyl, naphthalene, anthracene, imidazole, indole, carbazole, furan, benzofuran, benzimidazole, oxazole, benzoxazole, benzothiazole, pyridine, triazole, pyrazole, thiophene and the like are listed, and further preferably, phenyl, naphthalene, anthracene and indole are listed.

[0028] $^aM^+$ represents a monovalent cation, and specifically, and specifically include, Li^+ , Na^+ , K^+ , phosphonium, selenonium, oxonium, siliconium, carbonium, sulfonium, iodonium diazonium, ammonium and azinium ions.

[0029] Here, the azinium is a moiety having an azine ring which is a 6-membered ring containing a nitrogen atom in the structure, and includes pyridinium, diazinium and triazinium. Azinium contains one or more aromatic rings condensed with an azine ring, and includes, for example, quinolinium, isoquinolinium, benzoazinium, naphthoazinium and the like. Specifically, those described, for example, in USP 4,743,528, JP-A Nos. 63-138345, 63-142345 and 63-142346, and JP-B No. 46-42363, and counter cations forming 1-methoxy-4-phenylpyridinium tetrafluoroborate, N-alkoxypyridinium salts and the like are examples.

[0030] Of these cations, Li^+ , Na^+ , K^+ , ammonium, iodonium and sulfonium are preferable from the standpoints of stability and sensitivity, and compounds having a diaryl iodonium or triaryl sulfonium skeleton represented by the following general formula (^aM-I) or (^aM-II) are further preferable from the standpoints of stability and sensitivity.

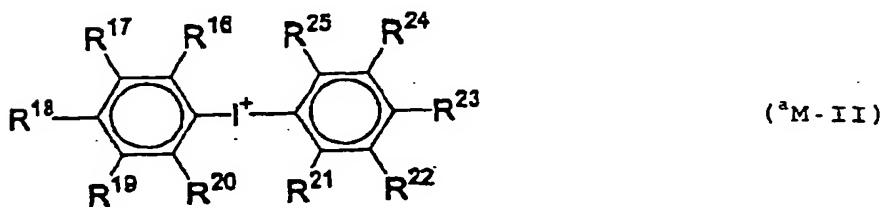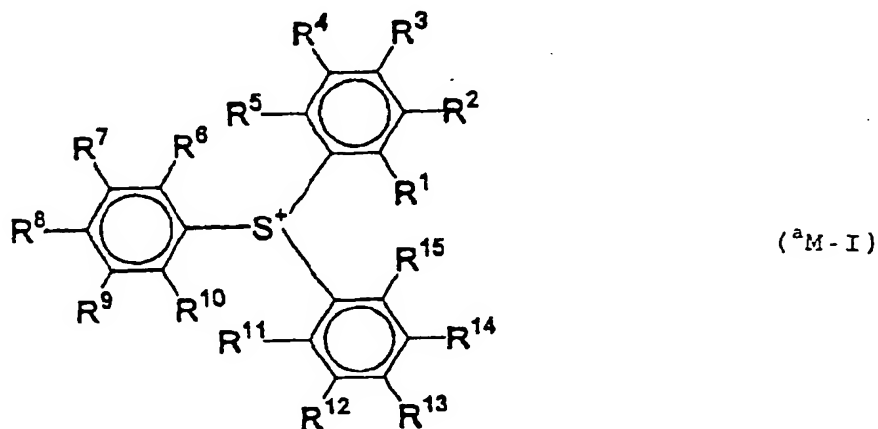

[0031] In the above-mentioned formulae (^aM-I) and (^aM-II), R^1 to R^{25} independently represent a hydrogen atom, linear, branched or cyclic alkyl group, linear, branched or cyclic alkoxy group, hydroxy group, halogen atom or $-S-R^{26}$ group. Here, R^{26} represents a linear, branched or cyclic alkyl or aryl group.


[0032] As the linear and branched alkyl groups R^1 to R^{25} in the general formula (^aM-I) or (^aM-II), groups having 1 to 4 carbon atoms such as a methyl group, ethyl group, propyl group, n-butyl group, sec-butyl group and t-butyl group, optionally having a substituent, are listed. As the cyclic alkyl group, groups having 3 to 8 carbon atoms such as a cyclopropyl group, cyclopentyl group and cyclohexyl group, optionally having a substituent, are listed.

[0033] As the alkoxy groups R^1 to R^{25} , groups having 2 to 4 carbon atoms such as a methoxy group, ethoxy group, hydroxyethoxy group, propoxy group, n-butoxy group, isobutoxy group, sec-butoxy group and t-butoxy group are listed.

[0034] As the halogen atoms R¹ to R²⁵, a fluorine atom, chlorine atom, bromine atom and iodine atom are listed.

[0035] As the aryl group R²⁶, groups having 6 to 14 carbon atoms such as a phenyl group, tolyl group, methoxyphenyl group, naphthyl group and the like are listed. The aryl group may have a substituent.

[0036] As the preferable substituent which can be carried on groups R¹ to R²⁵, alkoxy groups having 1 to 4 carbon atom, halogen atoms (fluorine atom, chlorine atom, iodine atom), aryl groups having 6 to 10 carbon atom, alkenyl groups having 2 to 6 carbon atoms, cyano group, hydroxyl group, carboxy group, alkoxycarbonyl groups, nitro group and the like are listed.




General formula (B)

[0037] In the general formula (B), ^bY has the same definition as for ^aX in the general formula (A) or represents -OH, -CN, -NO₂, -Si (R⁵) (R⁶) (R⁷), and R³ to R⁷ may be the same or different and represent a monovalent non-metal atom. ^bM⁺ represents a monovalent cation, and specific examples preferably include the same cations listed as examples for the general formula (A).

[0038] Specifically, R³ to R⁷ have the same definition as that for R¹ and R² in the general formula (A), and R³ and R⁴ preferably represent a hydrogen atom, alkyl group having 1 to 6 carbon atoms or aryl group having 6 to 10 carbon atom. Further, R³ and R⁴ may bond with each other to form a ring.

[0039] R⁵ to R⁷ preferably represent an alkyl group having 1 to 6 carbon atoms, aryl group having 6 to 10 carbon atoms or alkoxy group having 1 to 6 carbon atoms.




General formula (C)

[0040] In the general formula (C), R⁸ represents a monovalent non-metal atom. Ar¹ and Ar² may be the same or different and represent an aryl group. ^cM⁺ represents a monovalent cation, and specific examples include the same cations gives as examples for the general formula (A).


[0041] Specifically, R⁸ has the same definition as R¹ and R² in the general formula (A), and R⁸ represents preferably a hydrogen atom, alkyl group having 1 to 6 carbon atoms, aryl group having 6 to 10 carbon atom or a hydroxyl group.

[0042] As the Ar¹ and Ar², specifically, phenyl, naphthalene, anthracene, imidazole, indole, carbazole, furan, benzofuran, benzimidazole, oxazole, benzoxazole, benzothiazole, pyridine, triazole, pyrazole, thiophene are listed, and further preferably, phenyl, naphthalene, anthracene and indole are listed.


[0043] Among them, examples of acid/radical generating agent suitably used in the present invention, from the standpoints of stability and heat reactivity include those represented by the general formula (A) in which ^aX has the following structure:




and, those represented by the general formula (B) in which ^bY has one of the the following structures, and those represented by the general formula (C).



[0044] Among the above-mentioned materials, the most preferable acid/radical generating agents are those represented by the general formula (A) in which ^aX has the following structure:



[0045] The general formula (D) is as follows.



[0046] In the above-mentioned formula, ^dR represents preferably an alkyl group having 1 to 20 carbon atoms or an aryl group having 1 to 20 carbon atoms. ^dR may have a cyclic structure. Further, these alkyl group and aryl group may have a substituent, and as the substituents which can be introduced, for example, alkyl groups, alkoxy groups, alkenyl groups, alkynyl groups, amino groups, cyano group, hydroxyl group, halogen atoms, amide groups, ester groups, carbonyl group, carboxyl group and the like are specifically listed, and these may have a substituent as described above. Further, two or more substituents may be bond to each other to form a ring, and further, the cyclic structure may be a heterocyclic structure containing a nitrogen atom, sulfur atom and the like.


[0047] With regard to the polymerization initiator of the present invention, $^d\text{R}-\text{COOH}$, that is a conjugate acid of the carboxylate $^d\text{R}-\text{COO}^-$ of the general formula (D), has a pK_a in water of preferably 2 or more, further preferably 3 or more. When pK_a in water is 2 or more, the thermal decomposition temperature of the initiator tends to decrease, and this is believed to contribute to increase in sensitivity.

[0048] $^d\text{M}^+$ represents a counter cation selected from sulfonium, iodonium, diazonium, ammonium and azinium.


[0049] Here, the azinium is a moiety having an azine ring which is a 6-membered ring containing a nitrogen atom in the structure, and includes pyridinium, diazinium and triazinium. Azinium contains one or more aromatic rings condensed with an azine ring, and includes, for example, quinolinium, isoquinolinium, benzoazinium, naphthoazinium and the like. Specifically, those described, for example, in USP 4,743,528, JP-A Nos. 63-138345, 63-142345 and 63-142346, and JP-B No. 46-42363 are listed, and counter cations forming 1-methoxy-4-phenylpyridinium tetrafluoroborate, N-alkoxypyridinium salts and the like are given as examples.

[0050] Of these cations, compounds having, as a counter cation, iodonium or sulfonium are preferable, further, compound having a diaryliodonium or triarylsulfonium skeleton are preferable from the standpoints of stability and sensitivity. The structure of the iodonium skeleton is preferably a diarylsulfonium skeleton from the standpoint of stability, and the aryl group may be substituted in the same manner as for the above-mentioned aryl group.

[0051] Further, the general formula (E) is as follows.



[0052] In the above-mentioned formula, $^e\text{X}^-$ is an anion of a compound having a structure of the following general formula (F).



General formula (F)













[0053] In the above-mentioned formula, FY represents a single bond, $-\text{CO}-$ or $-\text{SO}_2-$. FY preferably represents $-\text{CO}-$






from the standpoints of sensitivity and stability, and compounds of the general formula (F) having a pKa from 0 to 6 are further preferable embodiments.













[0054] Each of R^a and R^b independently represents a linear, branched or cyclic alkyl group, aryl group, aralkyl group or camphor group. R^a and R^b may be connected via an alkylene group, arylene group or aralkyl group to form a ring. When FY is a -CO- group, R^b may be a hydroxyl group or alkoxy group.









[0055] R^a and R^b preferably represent an alkyl group having 1 to 20 carbon atoms, an aryl group having 1 to 20 carbon atoms or an aralkyl group having 1 to 20 carbon atoms. The alkyl group, aryl group and aralkyl group may have a substituent, and as the substituents which can be introduced, for example, alkyl groups, alkoxy groups, alkenyl groups, alkynyl groups, amino groups, cyano group, hydroxyl group, halogen atoms, amide groups, ester groups, carbonyl group, carboxyl group and the like are specifically listed, and these may have a substituent as described above. Further, two or more substituents may bond to each other to form a ring, and further, the cyclic structure may be a heterocyclic structure containing a nitrogen atom, sulfur atom and the like.

[0056] Examples of compounds having a structure of the general formula (F) which can form a counter anion of the compound (E) are given below, but the scope of the present invention is not limited to these examples.




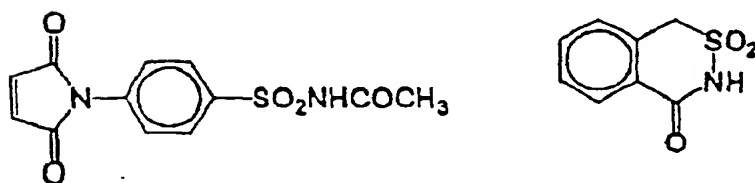




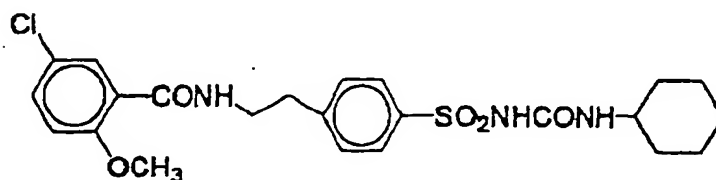

[0057] More preferable examples of the component (E) include compounds having the following general formulae (ii) and (iii). By using these compounds, sensitivity and printing endurance become more excellent. By heating these compounds or irradiating a composition containing a light-heat converting agent with light to generate heat, compounds having a structure of the general formula (F) corresponding to X[•] in the general formula (ii) or (iii), function as an acid generating agent or radical initiator.

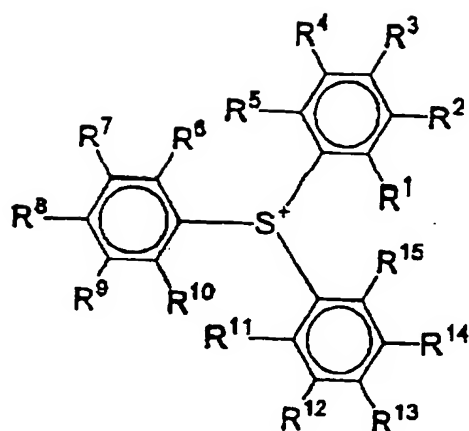

X⁻ General formula (ii)

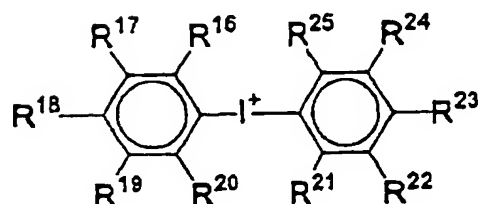

X⁻ General formula (iii)

[0058] In the above-mentioned formulae, R¹ to R²⁵ represent a hydrogen atom, linear, branched or cyclic alkyl group, linear, branched or cyclic alkoxy group, hydroxy group, halogen atom or -S-R²⁶ group. Here, R²⁶ represents a linear, branched or cyclic alkyl or aryl group. Here, X⁻ is an anion of a compound having a structure of the general formula (F).

[0059] As the linear and branched alkyl groups R¹ to R²⁵ in the general formula (ii) or (iii), groups having 1 to 4 carbon atoms such as a methyl group, ethyl group, propyl group, n-butyl group, sec-butyl group and t-butyl group, optionally having a substituent, are listed. As the cyclic alkyl group, groups having 3 to 8 carbon atoms such as a cyclopropyl group, cyclopentyl group and cyclohexyl group, optionally having a substituent, are listed.

[0060] As the alkoxy groups R¹ to R²⁵, groups having 2 to 4 carbon atoms such as a methoxy group, ethoxy group, hydroxyethoxy group, propoxy group, n-butoxy group, isobutoxy group, sec-butoxy group and t-butoxy group are listed.

[0061] As the halogen atoms R¹ to R²⁵, a fluorine atom, chlorine atom, bromine atom and iodine atom are listed.

[0062] As the aryl group R²⁶, groups having 6 to 14 carbon atoms such as a phenyl group, tolyl group, methoxyphenyl group, naphthyl group and the like are listed. The aryl group may have a substituent.

[0063] As the preferable substituent which can be carried on groups R¹ to R²⁵, alkoxy groups having 1 to 4 carbon atom, halogen atoms (fluorine atom, chlorine atom, iodine atom), aryl groups having 6 to 10 carbon atom, alkenyl groups having 2 to 6 carbon atoms, cyano group, hydroxyl group, carboxy group, alkoxycarbonyl groups, nitro group and the like are listed.


[0064] M⁺ represents a counter cation selected from sulfonium, iodonium, diazonium, ammonium and azinium.

[0065] Here, the azinium is a moiety having an azine ring which is a 6-membered ring containing a nitrogen atom in the structure, and includes pyridinium, diazinium and triazinium. Azinium contains one or more aromatic rings condensed with an azine ring, and includes, for example, quinolinium, isoquinolinium, benzoazinium, naphthoazinium and the like. Specifically, those described, for example, in USP 4,743,528, JP-A Nos. 63-138345, 63-142345 and 63-142346, and JP-B No. 46-42363 are listed, and counter cations forming 1-methoxy-4-phenylpyridinium tetrafluoroborate, N-alkoxypyridinium salts and the like are examples.


[0066] Of these cations, compound having, as a counter cation, iodonium or sulfonium are preferable from the standpoints of stability and sensitivity, and further, compounds having a diaryl iodonium or triaryl sulfonium skeleton are preferable.

[0067] Specific examples of the acid/radical generating agent of the general formulae (A) to (E) are shown below in combination with anion portions corresponding to the preferable counter cation, but the scope of the present invention is not limited to these examples.

[0068] First, specific examples of the acid/radical generating agent of the general formulae (A) [Exemplary compounds (I-1) to (I-28)] are given.




(I-1)




(I-2)



(I-3)





(I-4)




(I-5)





(I-6)



(I-7)




(I-8)

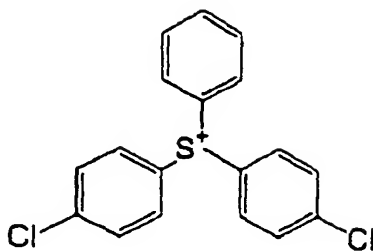



(I-9)




(I-10)





(I-11)

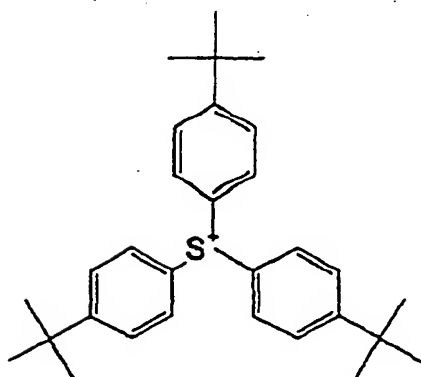

(I-12)





(I-13)




(I-14)




(I-15)




(I-16)




(I-17)




(I-18)




(I-19)




(I-20)




(I-21)





(I-22)




(I-23)





(I-24)





(1-25)





(1-26)



(1-27)




(1-28)

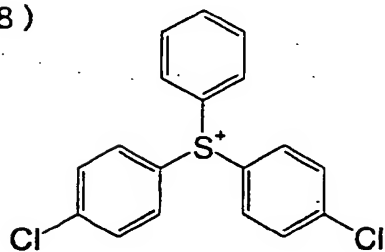

[0069] In addition, as a preferable specific example of the acid/radical generating agent of the general formula (A), Exemplary compound (I-a) is shown below.

(I - a)

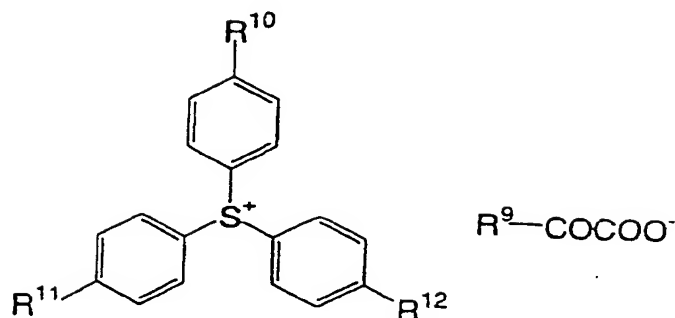

wherein, R^9 represents a phenyl group or an alkyl group having 1 to 4 carbon atom(s); and R^{10} , R^{11} and R^{12} independently represents a halogen atom, methyl group, chloro group or butyl group.

[0070] Since the counter anion of the above-shown compound (I-a) has the structure of $-CO_2COO^-$, compound (I-a) is superior in thermal degradability, high sensitivity, and stability.

[0071] Followings are the 1H NMR spectral peaks observed using Unity-plus (300MHz) (trade name, manufactured by Varian Associates, Inc.) of the above-shown (I-1), (I-2), (I-12), (I-24) and (I-25).

(I-1) : 7.38 (m, 2H), 7.48(m, 1H), 7.61-7.74 (m, 9H), 7.82 (m, 6H), and 8.06(m, 2H)


(I-2): 2.29(s, 9H) and 7.67-7.80(m, 15H)

(I-12): 1.32(s, 9H), 7.38(m, 2H), 7.47(m, 1H), 7.63(m, 6H), 7.74(m, 6H), and 8.09(m, 2H)


(I-27): 2.42(s, 6H), 7.33-7.49(m, 7H), 7.59-7.76(m, 7H), 7.73-7.76(m, 2H), and 8.04-8.07(m, 2H)

(I-28): 7.36-7.41(m, 2H), 7.47-7.52(m, 1H) and 7.56-7.87(m, 13H).


[0072] Specific examples of the acid/radical generating agent of the general formula (B) [Exemplary compounds (II-1) to (II-47)] are shown below.





(II - 1)




(II - 2)




(II-3)

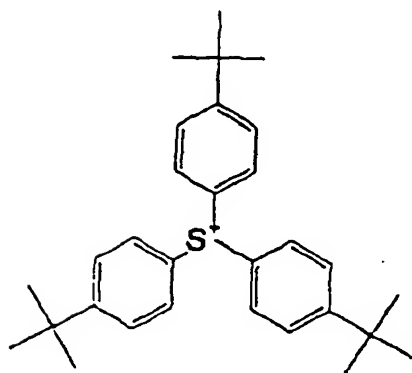


(II-4)




(II-5)




(II-6)

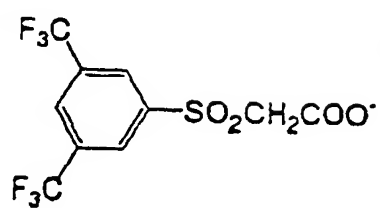


(II-7)




OMe




(II-8)








(II-9)





(II-10)




(II-11)




(II-12)




(II-13)






(II-14)




(II-15)





(II-16)




(II-17)




(II-18)




(II-19)




(II-20)





(II - 2 1)




(II - 2 2)




(II - 2 3)




(II - 24)




(II - 25)





(II - 26)




(II - 27)




(II - 28)




(II - 29)




(II - 30)







(II-31)





(II-32)




(II-33)





(II-34)

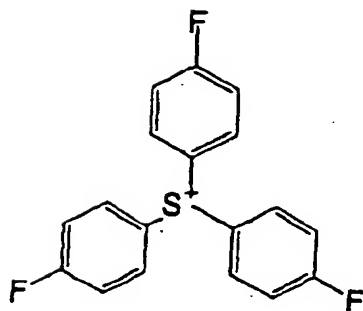






(II-35)





(II-36)




(II-37)




(II-38)






(II-39)

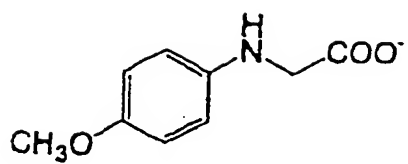


(II-40)




(II-41)




(II-42)





(II-43)




(II-44)




(II-45)







(II-46)




(II-47)




[0073] Specific examples of the acid/radical generating agent of the general formula (C) [Exemplary compounds (III-1) to (III-17)] are shown below.




(III-1)





(III-2)




(III-3)




(III-4)




(III-5)




(III-6)




(III-7)





(III-8)

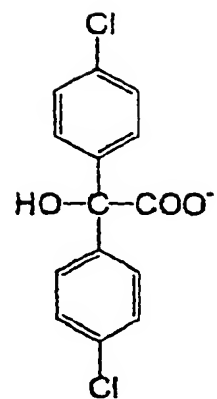


(III-9)

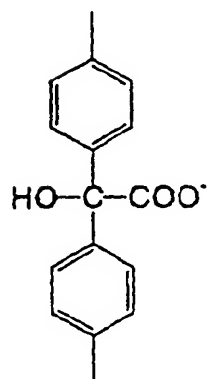


(III-10)




(III-11)





(III-12)




(III-13)




(III-14)




(III-15)





(III-16)

























(III-17)


























[0074] Examples of carboxylic acid suitable for forming the radical polymerization initiator of the general formulae (A) to (C) are shown below.


















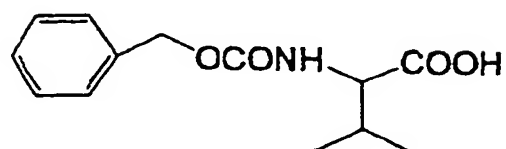


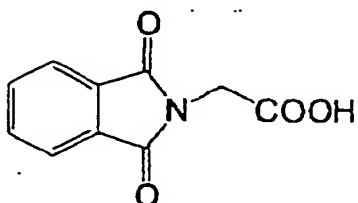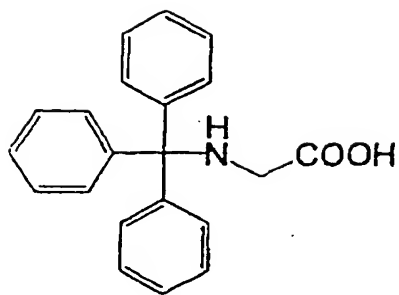




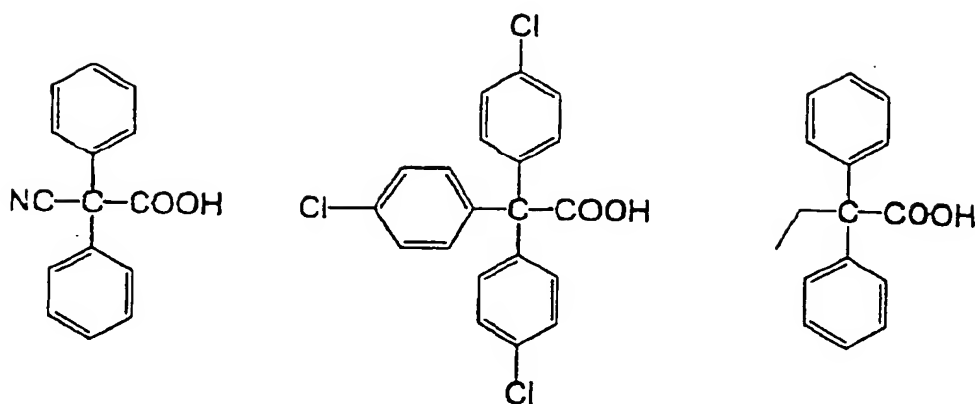


[0075] As specific examples of the acid/radical generating agent of the general formulae (D), first, preferable iodonium salt (iodonium is counter cation) compounds [Exemplary compounds (IVA-1) to (IVJ-8)] are shown below.




(IVA-1)




(IVA-6)




(IVA-2)




(IVA-7)




(IVA-3)




(IVA-8)




(IVA-4)





(IVA-9)




(IVA-5)




(IVA-10)




(IVA-11)

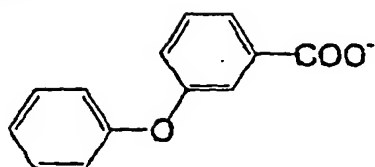


(IVA-15)




(IVA-12)

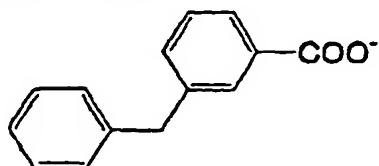


(IVA-16)




(IVA-13)




(IVA-17)





(IVA-14)




(IVA-18)




(IVA-19)




(IVA-20)




(IVA-25)




(IVA-21)




(IVA-26)




(IVA-22)




(IVA-27)




(IVA-23)





(IVA-28)




(IVA-24)




(IVA-29)



(IVA-30)

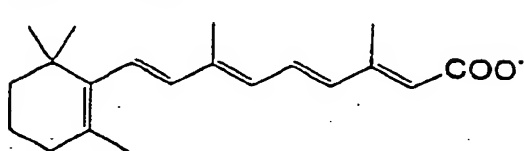

(IVA-31)




(IVA-34)





(IVA-32)




(IVA-35)




(IVA-33)




(IVB-1)



(IVB-7)




(IVB-2)




(IVB-8)




(IVB-3)




(IVB-9)




(IVB-4)




(IVB-10)





(IVB-5)




(IVB-11)




(IVB-6)




(IVB-12)




(IVB-17)




(IVB-18)




(IVB-13)




(IVB-19)



(IVB-14)




(IVB-20)




(IVB-15)





(IVB-21)




(IVB-16)




(IVB-22)




(IVC-1)




(IVC-6)



(IVC-2)




(IVC-7)





(IVC-3)




(IVC-4)




(IVC-5)

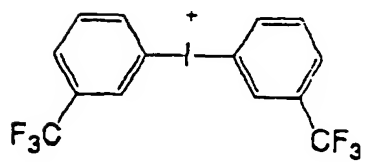


(IVD-1)




(IVD-2)





(IVD-3)




(IVD-4)




(IVD-5)




(IVE-1)



(IVE-7)




(IVE-2)



(IVE-8)




(IVE-3)




(IVE-9)




(IVE-4)




(IVE-10)





(IVE-5)




(IVE-11)




(IVE-6)




(IVF-1)




(IVF-2)





(IVF-3)




(IVF-4)




(IVF-5)




(IVG-1)




(IVG-7)




(IVG-2)




(IVG-8)




(IVG-3)




(IVG-9)




(IVG-4)




(IVG-10)




(IVG-5)




(IVG-11)




(IVG-6)







10 (IVG-12)




(IVG-17)




20 (IVG-13)




(IVG-18)




30 (IVG-19)




35 (IVG-14)




40 (IVG-20)





45 (IVG-15)




(IVG-21)




(IVG-16)



(IVH-1)




(IVH-2)




(IVH-3)




(IVH-4)







(IVI - 1)



(IVI - 7)




(IVI - 2)




(IVI - 8)




(IVI - 3)




(IVI - 9)




(IVI - 4)




(IVI - 10)




(IVI - 5)




(IVI - 11)




(IVI - 6)






10 (IV-12)




(IV-17)




25 (IV-13)




(IV-18)




(IV-19)




(IV-14)




(IV-20)




(IV-15)




(IV-21)




(IV-16)




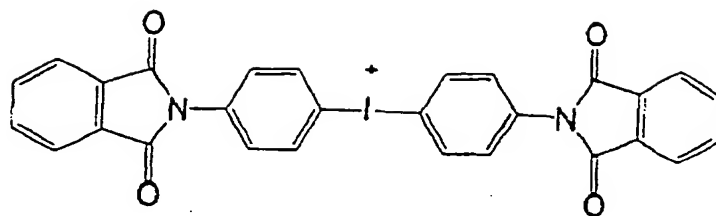


(IVJ-1)




(IVJ-6)

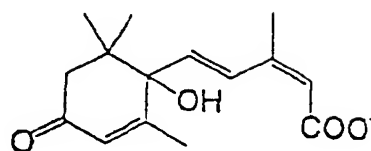


(IVJ-2)




(IVJ-7)




(IVJ-3)




(IVJ-8)




(IVJ-4)




(IVJ-5)




[0076] As the structure of a sulfonium skeleton, a triarylsulfonium skeleton is preferable from the standpoints of sensitivity and stability, and the aryl group may be substituted in the same manner as for the above-mentioned aryl group. Then, preferable sulfonium salt (sulfonium is a counter cation) compounds [Exemplary compounds (SA-1) to (SJ-12)] are shown below.




(SA-1)




(SA-6)




(SA-2)




(SA-7)




(SA-3)




(SA-8)




(SA-4)




(SA-9)




(SA-5)




(SA-10)







(SA-11)

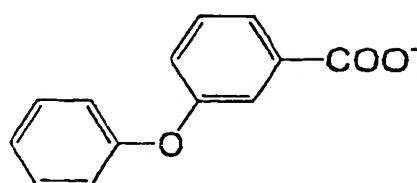


(SA-15)

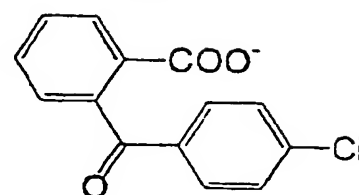


(SA-12)

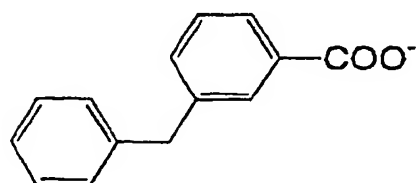


(SA-16)




(SA-13)





(SA-17)




(SA-14)




(SA-18)




(SA-19)




(SA-24)




(SA-20)




(SA-25)




(SA-21)




(SA-26)





(SA-22)




(SA-23)




(SA-27)




(SA-28)

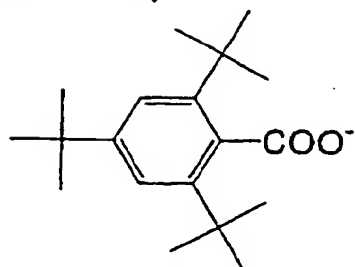


(SA-33)




(SA-34)




(SA-29)




(SA-35)




(SA-30)





(SA-31)




(SA-36)




(SA-32)




(SA-37)




(SA-41)




(SA-38)





(SA-42)




(SA-39)




(SA-40)




(SB-1)




(SB-7)




(SB-2)



(SB-3)




(SB-8)




(SB-9)




(SB-4)




(SB-10)





(SB-5)



(SB-11)




(SB-6)



(SB-12)




(SB-18)




(SB-13)




(SB-19)




(SB-14)




(SB-20)




(SB-15)




(SB-21)




(SB-16)




(SB-22)

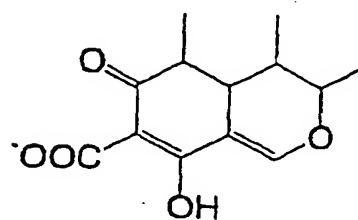


(SB-17)







(SC-1)




(SC-5)



(SC-2)




(SC-6)




(SC-3)




(SC-7)





(SC-4)




(SC-8)




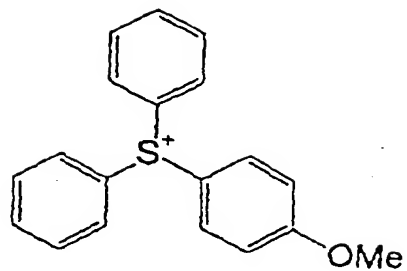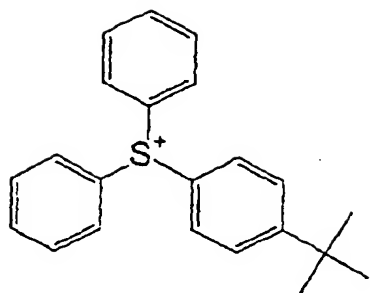

20 (SD-1)






(SE-1)




30 (SD-2)




(SE-2)

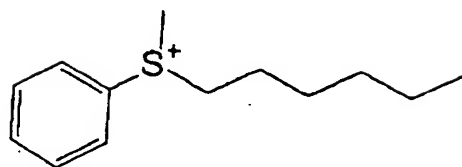


(SF-1)




(SG-1)





(SG-2)




(SF-2)





(SF-3)




(SH-1)




(SH-2)




(S1-1)




(S1-5)




(S1-2)




(S1-6)




(S 1 - 3)





(S 1 - 7)




(S 1 - 4)

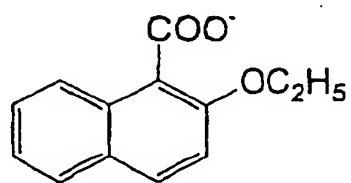


(S 1 - 8)

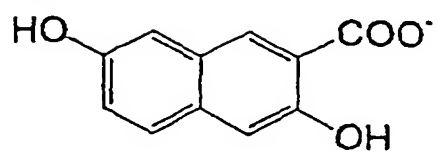


(S 1 - 9)




(S 1 - 13)




(S I - 10)




(S I - 14)




(S I - 11)





(S I - 15)

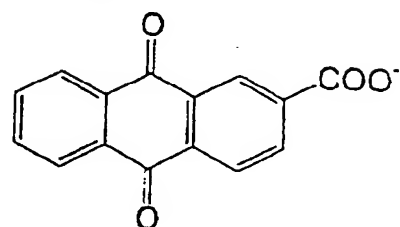


(S I - 12)




(S I - 16)




(S J - 1)




(S J - 5)




(S J - 2)




(S J - 6)




(S J - 3)

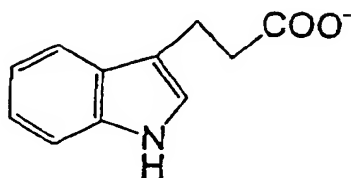


(S J - 7)




(S J - 4)




(S J - 8)







(S J - 9)




(S J - 10)






















(S J - 11)




(S J - 1 2)





[0077] In radical polymerization initiators regarding compounds of the general formula (D), examples of carboxylic acids (R-COOH) suitable for forming a cation portion ($^dR-COO^-$) are shown below.




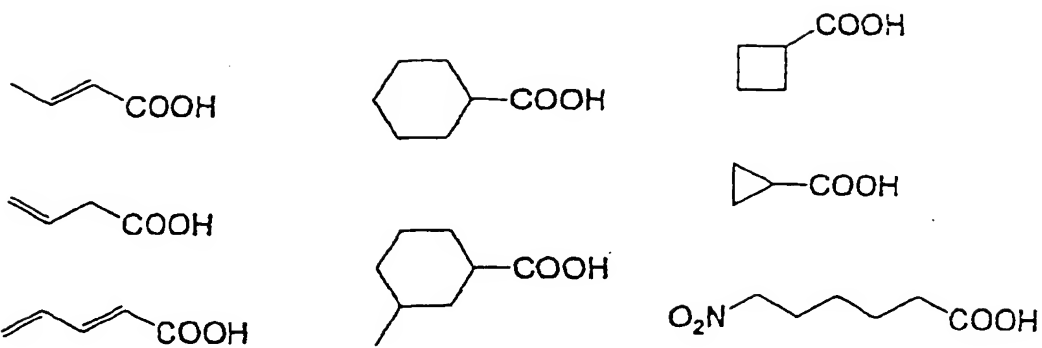


5



10





15





20

25





30

35





40












45





50

55





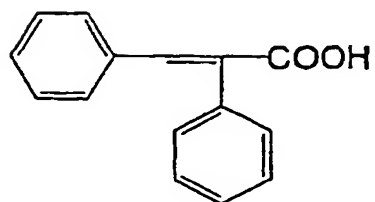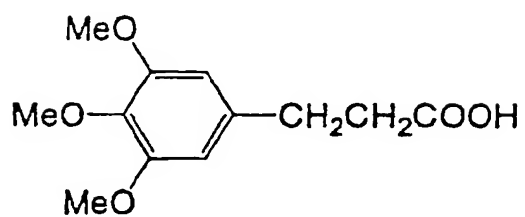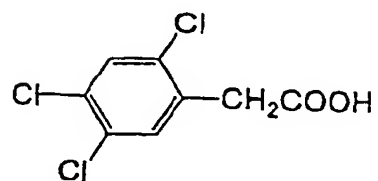

5





10

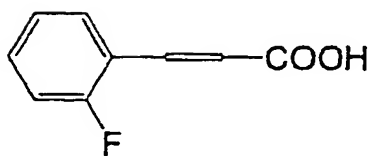



15

20





25

30



35













40





45

50



55

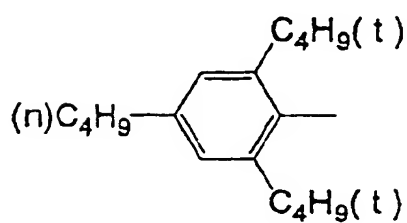

5





10





15

20

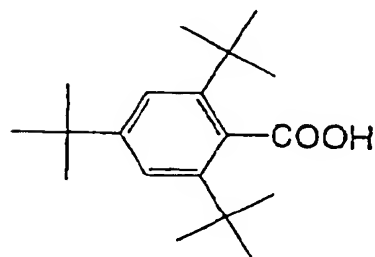



25

30



35

40




45


50

55



5




10

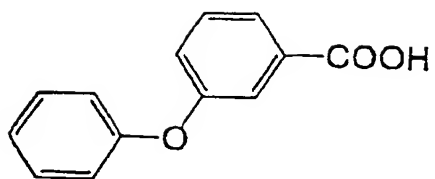


15

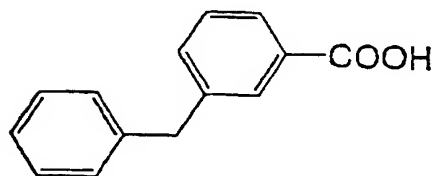


20




25




30




35



40


















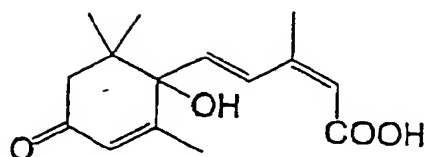


45






50

55

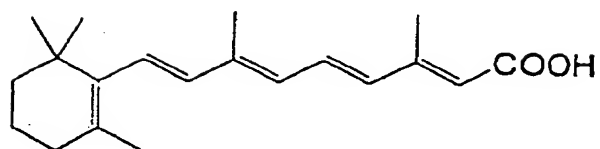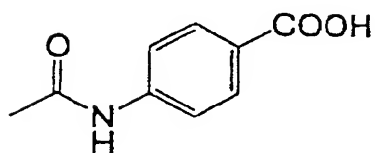

























COOH

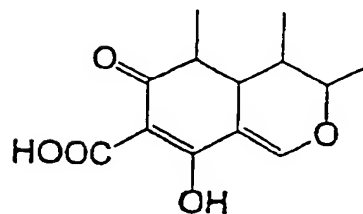CC(=O)NCC(=O)O





50






55









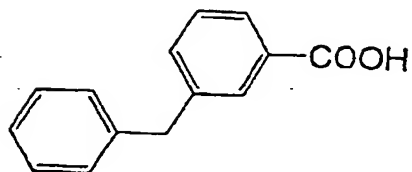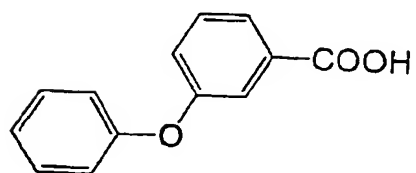








[0078] As specific examples of the acid/radical generating agent of the general formula (E), the following exemplary compounds (ii-1) to (ii-28) are shown.

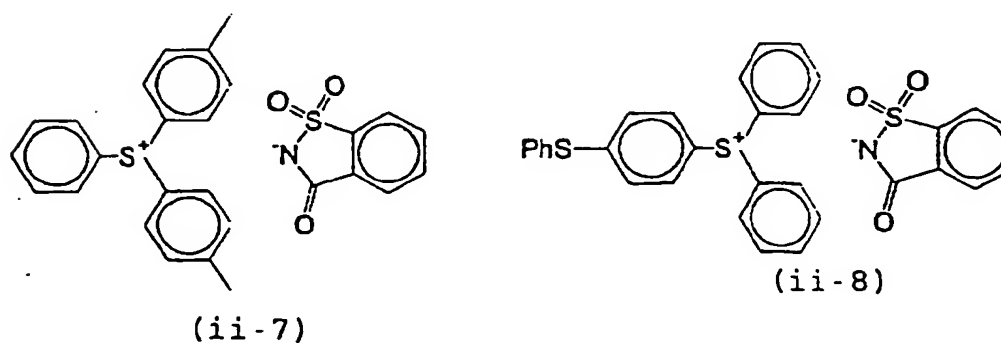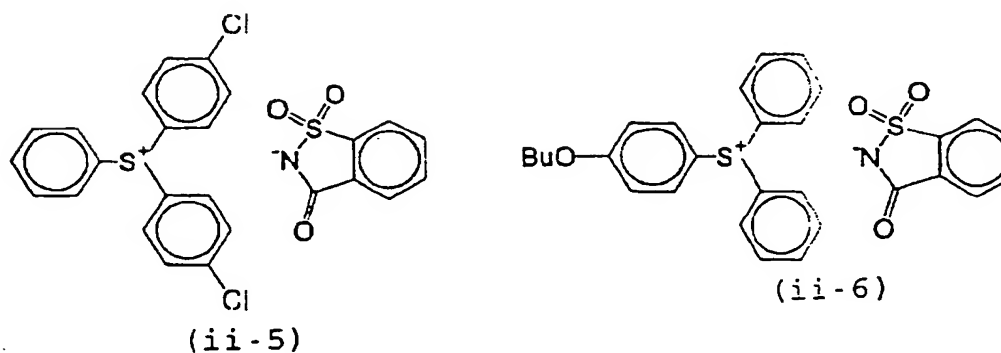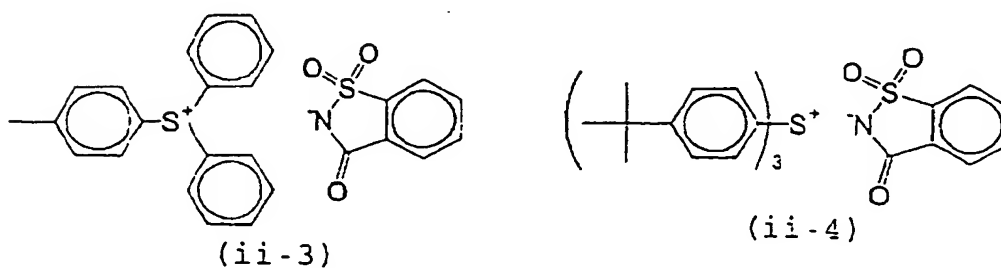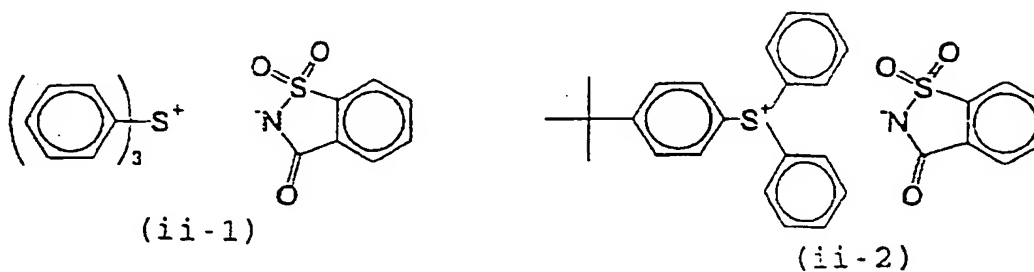

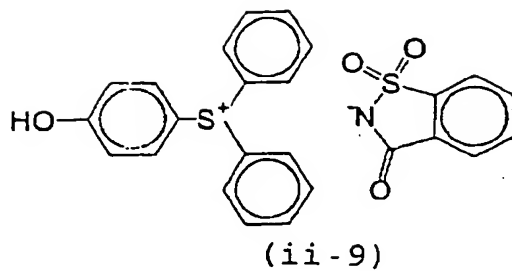


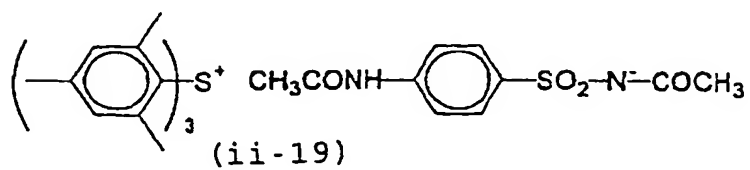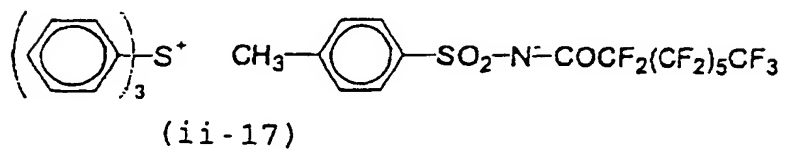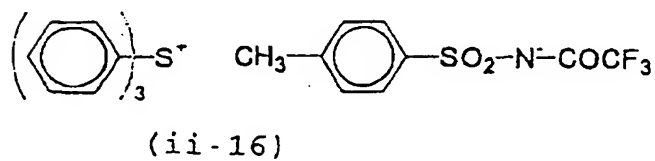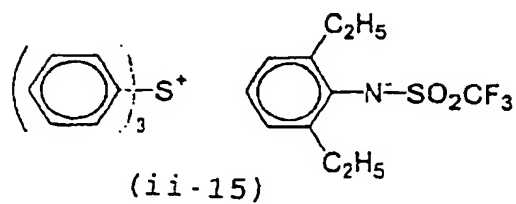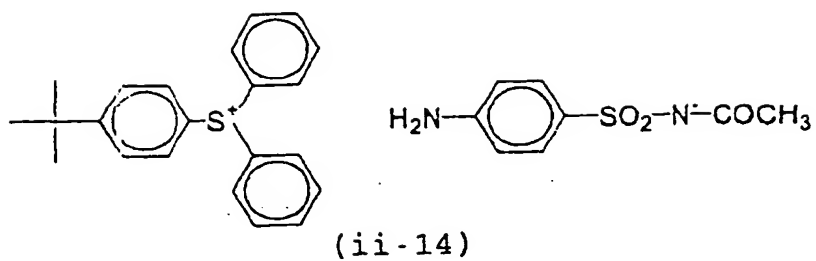

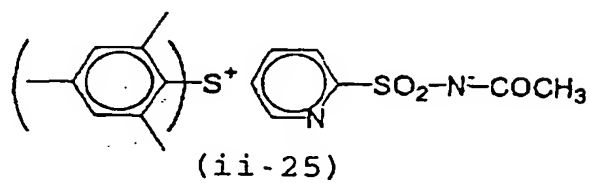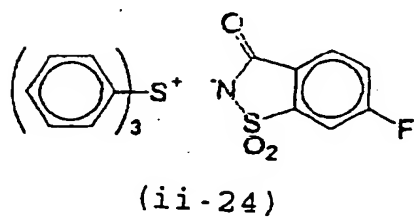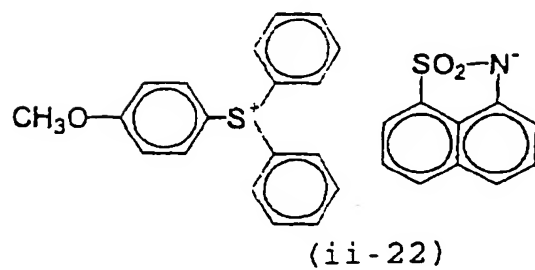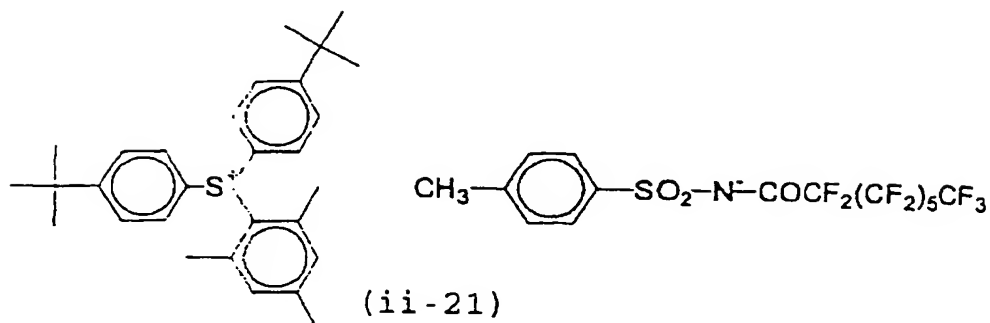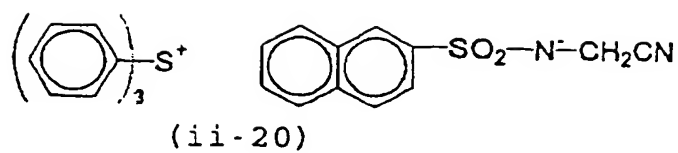




(ii-26)

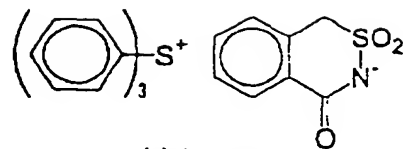


(ii-27)




(ii-28)

[0079] As the structure of an iodonium skeleton, a diaryliodonium skeleton is preferable from the standpoints of sensitivity and stability, and the aryl group may be substituted in the same manner as for the above-mentioned aryl group.


[0080] As preferable iodonium salts, namely, as the acid/radical generating agent of the general formula (iii), the following exemplary compounds (iii-1) to (iii-15) are listed.

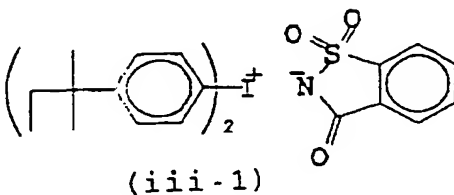







(iii-1)






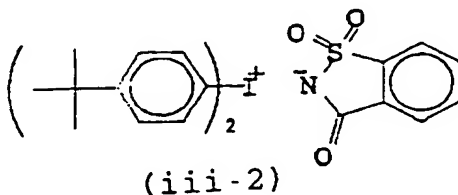


(iii-2)

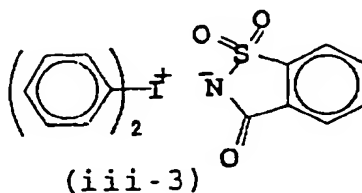

(iii-3)

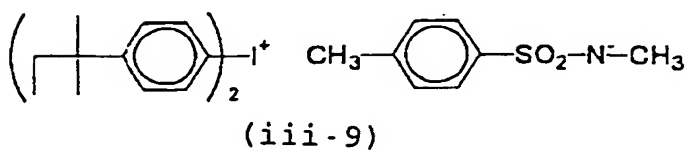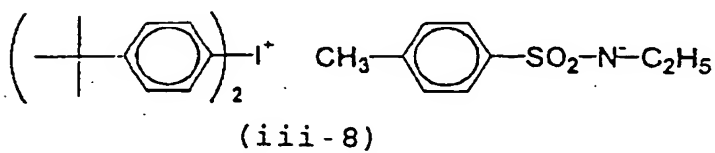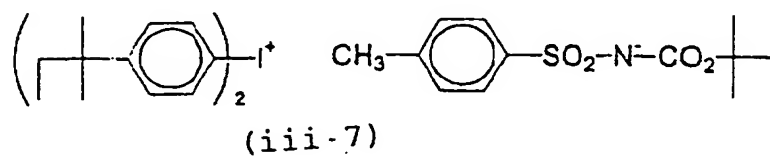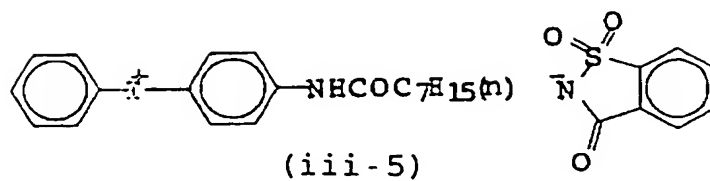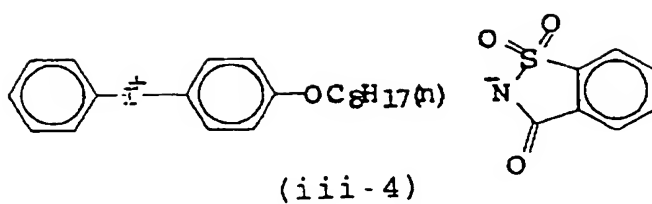

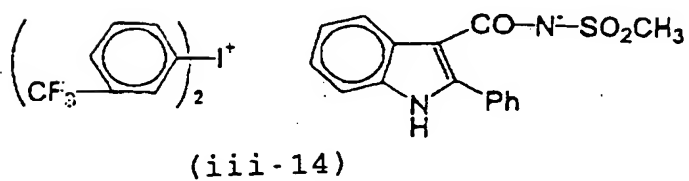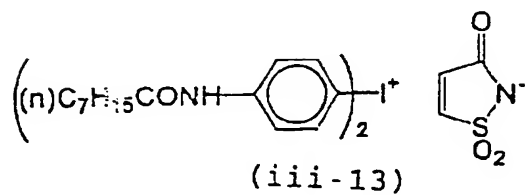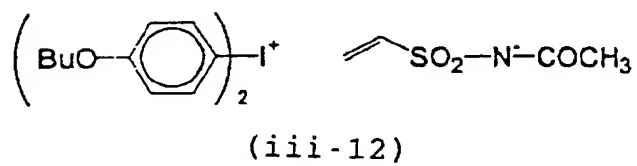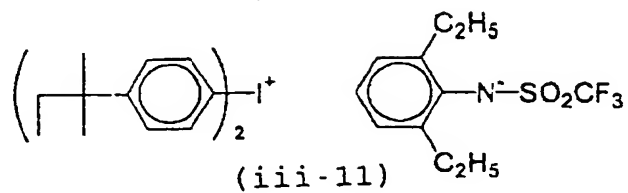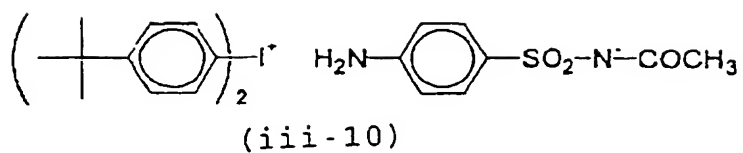

[0081] Synthesis examples of (I-1) triphenylsulfonium benzoylformate is given as a typical example. Synthesis of triphenylsulfonium benzoylformate

[0082] 76 g of diphenylsulfoxide was dissolved in 1000 ml of benzene, to this was added 300 g of aluminum chloride, and the mixture was refluxed for 24 hours. The reaction solution was poured, under ice cooling, into 2 L of water, and to this was added 500 ml of concentrated hydrochloric acid, and the mixture was heated at 70°C for 10 minutes. This aqueous solution was washed with 800 ml of ethyl acetate, and filtrated, then, a solution prepared by disdissolving 200 g of ammonium iodide in 600 ml of water was added to the solution.

[0083] The precipitated powder was filtrated and washed with water, then, washed with ethyl acetate and dried to obtain 98 g of triphenylsulfonium iodide.

[0084] 78 g of triphenylsulfonium iodide was dissolved in 1000 ml of methanol, to this solution was added 48.7 g of silver oxide, and the mixture was stirred at room temperature for 4 hours. The solution was filtrated, and to this was added excess amount of 34.0 g of benzoylformic acid. The reaction solution was concentrated, and the concentrated solution was washed with 200 ml of ethyl acetate, 100 ml of hexane, 100 ml of acetone, and 200 ml of ethyl acetate succeedingly, the supernatant was reslurried, and dried under reduced pressure to obtain 75 g of triphenylsulfonium benzoylformate.

[0085] Other sulfonium salts can also be synthesized in the same manner. For example, compound (I-2) can be synthesized in the same manner as (I-1), except that pyruvic acid is substituted for the benzoylformic acid. Compound (I-27) can be synthesized in the same manner as (I-1), except that di-p-tolylsulfoxide is substituted for the diphenylsulfoxide in order to obtain an intermediate compound of di(4-methylphenyl)phenylsulfonium iodide. Compound (I-28) can be synthesized in the same manner as (I-1), except that di-4-chlorophenylsulfoxide is substituted for the diphenylsulfoxide in order to obtain an intermediate compound of di(4-chlorophenyl)phenylsulfonium iodide. Further, compound (I-12) can be synthesized in the same manner as (I-1), except that (4-t-buthylphenyl)sulfonium is obtained as a substitute for the triphenylsulfonium iodide.

[0086] Other sulfonium salts and iodonium salts can also be synthesized in the same manner by appropriately selecting starting substances and carboxylic acids to be added.

[0087] As other methods for obtaining iodonium iodide, methods described in Bull. Chem. Soc. Jpn. 70, 219-224 (1997), Bull. Chem. Soc. Jpn. 70, 1665-1669 (1997), Bull. Chem. Soc. Jpn. 70, 115-120 (1999), J. Amer. Chem. Soc; 82; 1960, 725-731, J. Amer. Chem. Soc; 81; 1959, 342-346, and the like can be used.

[0088] As other methods for obtaining sulfonium iodide, methods described in J. Amer. Chem. Soc; 91; 1969; 145-150, and the like can be used. As other methods for obtaining carboxylate of sulfonium, methods described in J. Org. Chem 35; 1970 2539-2543, and the like can be used.

[0089] The heat-sensitive composition of the present invention preferably contains an acid/radical generating agent of the above-mentioned general formulae (A) to (C) in an amount of 0.5 to 30% by weigh based on the total amount of solid components constituting the composition.

[0090] In the present invention, in addition to the above-mentioned specific acid/radical generating agent other known photopolymerization initiators, heat polymerization initiators and the like can be selected provided they are used in an amount which does not compromise the effect of the present invention. As these polymerization initiators which can be used together with the acid/radical generating agent, for example, known onium salts which do not have a carboxylic acid structure in a counter cation portion, triazine compounds having a trihalomethyl group, peroxides, azo-based polymerization initiators, azide compounds, quinonediazide and the like are listed.

[0091] As specific examples of the onium salts which can be suitably used as a radical generating agent which can be used together, those described in Japanese Patent Application No. 11-310623, paragraph Nos. [0030] to [0033] are listed.

[0092] Further, known polymerization initiators such as onium salts of the general formulae (I) to (IV) described in JP-A No. 9-34110, paragraph Nos. [0012] to [0050], heat polymerization initiators described in JP-A No. 8-108621, paragraph No. [0016], and the like, are preferably used.

[0093] When other polymerization initiators are used together with the acid/radical generating agent, the content of the polymerization initiator is preferably 50% by weight or less based on the above-mentioned specific acid/radical generating agent.

[0094] The acid/radical generating agent used in the present invention has a maximum absorption wavelength of preferably 400 nm or less, further preferably 360 nm or less. By thus controlling the absorption wavelength so as to be in an ultraviolet ray range, handling of an image formation material can be conducted under white light.

(II) Compound which manifests irreversible change in physical and chemical properties by acid or radical

[0095] The compound (II) which manifests irreversible change in physical and chemical properties by an acid or radical, and is the second essential component of the heat-sensitive composition of the present invention, will be described. This compound is a compound which whose physical properties and chemical properties change due to

the action of an acid or radical generated by heat of the above-mentioned acid/radical generating agent, and which remains in the changed condition. This compound is not particularly restricted and providing it has the above described nature any compound can be used. For example, compounds listed as examples of the above-mentioned acid/radical generating agent themselves often have such a nature. As the properties of the compound (II) which are changed by an acid or radical generated from the acid/radical generating agent, for example, molecular physical properties such as absorption spectrum (color), chemical structure, polarizability and the like, and material physical properties such as degree of solution, strength, refractive index, flowability, stickiness and the like.

[0096] When a compound whose absorption spectrum changes due to oxidation and reduction or due to a nucleophilic addition reaction is used as the compound (II), oxidation, reduction and the like are caused by an acid or radical generated by the acid/radical generating agent, enabling image formation. Such examples are disclosed in, for example, J. Am. Chem. Soc., 108, 128 (1986), J. Imaging. Soc., 30, 215 (1986), Israel. J. Chem., 25, 264 (1986).

[0097] By using an addition polymerizable or condensation polymerizable compound as the compound (II) and combining it with an acid/radical generating agent (II), a thermosetting resin or a negative photopolymer can be formed.

[0098] The optimum amount of the compound (II) content is appropriately selected in accordance with the desired change in properties or compounds used, and in general, when a compound manifesting change in absorption spectrum due to oxidation and reduction or due to a nucleophilic addition reaction is used, the content is from 0.5 to 40% by weight based on the total solid content of the composition, and when an addition polymerizable or condensation polymerizable compound is used, the content is from 0.5 to 30% by weight based on the total solid content of the composition.

[0099] As the compound (II) suitable for producing a planographic printing plate having high sensitivity which is one object of the present invention, (II-a) radical polymerizable compounds having an unsaturated bond are listed. These compounds will be described in detail below.

(II-a) Radical polymerizable compounds having unsaturated bond

[0100] The radical polymerizable compounds used in the present invention is an addition polymerizable compound having at least one ethylenically unsaturated double bond, and preferably selected from compounds having at least one, and preferably 2 or more terminal ethylenically unsaturated bonds. Such a compound group is widely known in the art, and in the present invention, can be used without particular restriction. These include compounds having chemical forms such as monomers and prepolymers, namely, dimers, trimers and oligomers, or mixtures thereof, and copolymers thereof, and the like. Examples of the monomer and copolymers thereof include unsaturated carboxylic acids (e.g., acrylic acid, methacrylic acid, itaconic acid, crotonic acid, isocrotonic acid, maleic acid and the like), and esters and amides thereof, and preferably, esters of unsaturated carboxylic acids with aliphatic polyhydric alcohol compounds, and amides of unsaturated carboxylic acids with aliphatic polyvalent amine compounds are used. Further, unsaturated carboxylates having a nucleophilic substituent such as a hydroxyl group, amino group, mercapto group and the like, adducts of amides with monofunctional or polyfunctional isocyanates, epoxys, and dehydration condensation reaction products with monofunctional or polyfunctional carboxylic acids, and the like, are also suitably used.

[0101] Further, unsaturated carboxylates having an electrophilic substituent such as an isocyanate group, epoxy group and the like, adducts of amides with monofunctional or polyfunctional alcohols, amines and thiols, unsaturated carboxylates having a releasable substituent such as a halogen group, tosyloxy group and the like, and substitution reaction products of amides with monofunctional or polyfunctional alcohols, amines or thiols, are also suitable. Furthermore, as other examples, a compound group obtained by substituting the above-mentioned unsaturated carboxylic acids with unsaturated phosphonic acid, styrene, vinyl ether and the like can also be used.

[0102] Specific examples of monomers of esters of aliphatic polyhydric alcohol compounds with unsaturated carboxylic acids, include acrylates, ethylene glycol diacrylate, triethylene glycol diacrylate, 1,3-butanediol diacrylate, tetramethylene glycol diacrylate, propylene glycol diacrylate, neopentyl glycol diacrylate, trimethylolpropane triacrylate, trimethylolpropane tri(acryloyloxypropyl) ether, trimethylolethane triacrylate, hexanediol diacrylate, 1,4-cyclohexanediol diacrylate, tetraethylene glycol diacrylate, pentaerythritol diacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, dipentaerythritol diacrylate, dipentaerythritol hexaacrylate, sorbitol triacrylate, sorbitol tetraacrylate, sorbitol pentaacrylate, sorbitol hexaacrylate, tri(acryloyloxyethyl) isocyanurate, polyester acrylate oligomer and the like.

[0103] As the methacrylates, there are listed tetramethylene glycol dimethacrylate, triethylene glycol dimethacrylate, neopentyl glycol dimethacrylate, trimethylolpropane trimethacrylate, trimethylolethane trimethacrylate, ethylene glycol dimethacrylate, 1,3-butanediol dimethacrylate, hexanediol dimethacrylate, pentaerythritol dimethacrylate, pentaerythritol trimethacrylate, pentaerythritol tetramethacrylate, dipentaerythritol dimethacrylate, dipentaerythritol hexamethacrylate, sorbitol trimethacrylate, sorbitol tetramethacrylate, bis[p-(3-methacryloxy-2-hydroxypropoxy)phenyl]dimethylmethane, bis[p-(methacryloxyethoxy)phenyl]dimethylmethane and the like.

[0104] As the itaconates, there are listed ethylene glycol diitaconate, propylene glycol diitaconate, 1,3-butanediol diitaconate, 1,4-butanediol diitaconate, tetramethylene glycol diitaconate, pentaerythritol diitaconate, sorbitol tetraita-

conate and the like.

[0105] As the crotonates, there are listed ethylene glycol dicrotonate, tetramethylene glycol dicrotonate, pentaerythritol dicrotonate, sorbitol tetradicrotonate and the like.

[0106] As the isocrotonate, there are listed ethylene glycol diisocrotonate, pentaerythritol diisocrotonate, sorbitol tetrakisocrotonate and the like.

[0107] As the maleates, there are listed ethylene glycol dimaleate, triethylene glycol dimaleate, pentaerythritol dimaleate, sorbitol tetramaleate and the like.


[0108] As examples of other esters, there are suitable used, for example, aliphatic alcohol-based esters described in JP-B Nos. 46-27926 and 51-47334, and JP-A No. 57-196231, those having an aromatic skeleton described in JP-A Nos. 59-5240, 59-5241 and 2-226149, those having an amino group described in JP-A No. 1-165613, and the like.

[0109] Further, the above-mentioned ester monomers can also be used as a mixture.

[0110] Specific examples of monomers of amides of aliphatic polyvalent amines with unsaturated carboxylic acids include methylenebis-acrylamide, methylenebis-methacrylamide, 1,6-hexamethylenebis-acrylamide, 1,6-hexamethylenebis-methacrylamide, diethylenetriaminetrisacrylamide, xylylenebisacrylamide, xylylenebismethacrylamide and the like.

[0111] As examples of the other preferable amide-based monomers, those having a cyclohexylene structure described in JP-B No. 54-21726 are listed.

[0112] Still further, urethane-based addition-polymerizable compounds produced by using an addition reaction of an isocyanate with a hydroxyl group are also suitable, and as specific examples thereof, vinylurethane compounds containing two or more polymerizable vinyl groups in one molecule obtained by adding a vinyl monomer having a hydroxyl group of the following general formula (2) to a polyisocyanate compound having two or more isocyanate groups in one molecule described in JP-B No. 48-41708, for example, and the like are listed.



General formula (2)

[0113] In the general formula (2), R and R' represent H or CH₃.

[0114] Further, urethane acrylates as described in JP-A No. 51-37193, JP-B Nos. 2-32293 and 2-16765, and urethane compounds having an ethylene oxide-based skeleton described in JP-B Nos. 58-49860, 56-17654, 62-39417 and 62-39418 are also suitable.

[0115] Even further, by using addition-polymerizable compounds having an amino structure or sulfide structure in the molecule described in JP-A Nos. 63-277653, 63-260909 and 1-105238, photosensitive compositions having extremely excellent photosensitive speed can be obtained.

[0116] As other examples, polyfunctional acrylates and methacrylates such as polyester acrylates, and epoxy acrylates obtained by reacting epoxy resins with (meth)acrylic acid, and the like, as described in JP-A No. 48-64183, JP-B Nos. 49-43191 and 52-30490, are listed. Further, certain unsaturated compounds described in JP-B Nos. 46-43946, 1-40337 and 1-40336, and vinylphosphonic acid-based compounds described in JP-A No. 2-25493, and the like, are also listed. In some cases, structures containing a perfluoroalkyl group described in JP-A No. 61-22048 are suitably used. Further, those introduced as photo-curing monomers and oligomers in Nippon Secchaku Kyokai Journal vol. 20, No. 7, 300 to 308 (1984) can also be used.

[0117] Details of methods for using these addition polymerizable compounds, such as a structure used, whether they are used singly or in combination, addition amount and the like, can be optionally set depending on the desired performance of the sensitive material obtained finally. They can be selected, for example, from the following standpoints. From the standpoint of photosensitive speed, a structure having high content of unsaturated groups per molecule is preferable, and in some cases, one having two or more functional groups is preferable. For increasing strength of the image portion, namely, a hardened film, a compound having three or more functional groups is preferred, and further, a method in which both of photosensitive property and strength are controlled by simultaneous use of compounds having a different number of functional groups and having different polymerizable groups (for example, acrylates, methacrylates, styrene-based compound, vinyl ether-based compounds) is also effective. Compounds having a large molecular weight and compounds having high hydrophobicity are, in some cases, not preferable from the standpoints of developing speed and precipitation in a developing solution, though they are excellent in photosensitive speed and film strength.

[0118] Further, the selection of addition polymerization compound, and the method in which it is used are important factors determining the compatibility and dispersability of the additions polymerization compound with the other components of the heat sensitive composition (e.g. binder polymer, initiator, coloring agent and the like), and for example, compatibility can be improved in some cases by use of a compound having low purity or by simultaneous use of two or more compounds.

[0119] The heat-sensitive composition of the present invention is characterized in that its properness change reversibly, and by adding a light-heat converting agent in addition to the above-mentioned components, change in properties as described above can be caused, namely, a composition having photosensitivity can be obtained, by heat mode exposure, typically, by laser emitting infrared ray.

[0120] This light-heat converting agent (III) will be described below.

(III) Light-heat converting agent

[0121] The light-heat converting agent functions to absorb a given wavelength of light and to convert it into heat. By heat generated in this reaction, namely, by heat mode exposure with a wavelength which can be absorbed by this light-heat converting agent (III), an acid/radical generating agent, a component (I) is decomposed to generate an acid or radical.

[0122] The light-heat converting agent used in the present invention is not particularly restricted providing it has a converts light absorbed into heat, and in general, there are listed dyes or pigments known as a so-called infrared absorber having an absorption maximum in wavelengths of an infrared laser usable for writing, namely, wavelengths from 760 nm to 1200 nm.


[0123] As the dye, commercially available dyes and, known materials described in literature such as, for example, "Dye Manual" (edited by Yuki Gosei Kagaku Kyokai, 1960) and the like can be used. Specifically, dyes such as azo dyes, metal complex salt azo dyes, pyrazoloneazo dyes, naphthoquinone dyes, anthraquinone dyes, phthalocyanine dyes, carbonium dyes, quinoneimine dyes, methine dyes, cyanine dyes, squarilium colorants, pyrylium salts, metal thiolate complexes, oxonol dyes, diimmonium dyes, aminium dyes, croconium acid and the like are listed.

[0124] As preferable dyes, for example, cyanine dyes described in JP-A Nos. 58-125246, 59-84356, 59-202829, 60-78787 and the like, methine dyes described in JP-A Nos. 58-173696, 58-181690 and 58-194595 and the like, naphthoquinone dyes described in JP-A Nos. 58-112793, 58-224793, 59-48187, 59-73996, 60-52940, 60-63744 and the like, squarilium dyes described in JP-A No. 58-112792 and the like, cyanine dyes described in GB-Patent No. 434,875, etc. are listed.


[0125] Further, near infrared absorbing sensitizers described in US-Patent No. 5,156,938 can also be used suitably, and also preferably used are arylbenzo(thio)pyrylium salts described in US-Patent No. 3,881,924, trimethine thiopyrylium salts described in JP-A No. 57-142645 (US-Patent No. 4,327,169), pyrylium-based compounds described in JP-A Nos. 58-181051, 58-220143, 59-41363, 59-84248, 59-84249, 59-146063 and 59-146061, cyanine colorants described in JP-A No. 59-216146, pentamethine thiopyrylium salts and the like described in US-Patent No. 4,283,475, and pyrylium compounds described in JP-B Nos. 5-13514 and 5-19702.

[0126] Further, as preferable examples of dyes, near infrared absorption dyes of the formulae (I) and (II) described in US-Patent No. 4,756,993 are listed.

[0127] Of these dyes, cyanine colorants, phthalocyanine colorants, oxonol colorants, squarilium colorants, pyrylium salts, thiopyrylium colorants and nickel thiolate complex are preferable. Cyanine colorants of the following general formula (a) to (e) are particularly preferable. Cyanine colorants of the following general formula (a) are most preferable since they bring out high polymerization activity in addition to stability and economy, when they are used in the polymerization composition of the present invention.

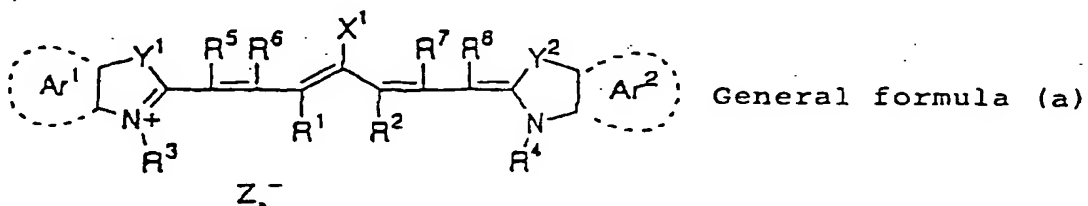

[0128] In the general formula (a), X¹ represents a halogen atom, -NPh₂, X²-L¹, or the groups listed below.










[0129] X^2 represents an oxygen atom or a sulfur atom, and L^1 represents a hydrocarbon group having 1 to 12 carbon atoms, an aromatic ring having heteroatom(s) or a hydrocarbon group having 1 to 12 heteroatoms, wherein said heteroatom is selected from the group consisting of a nitrogen atom, a sulfur atom, an oxygen atom, a halogen atom and a selenium atom.





[0130] Each of R^1 and R^2 independently represents a hydrocarbon group having 1 to 12 carbon atoms. From the standpoint of the storage stability of an application solution for a photosensitive layer, R^1 and R^2 are preferably a hydrocarbon group having 2 or more carbon atoms, and further, it is particularly preferable that R^1 and R^2 are bonded to each other to form a 5-membered or 6-membered ring.

[0131] Ar^1 and Ar^2 may be the same or different and represent an aromatic hydrocarbon group optionally having a substituent. As the preferable aromatic hydrocarbon group, a benzene ring and a naphthalene ring are listed. Further, as the preferable substituent, hydrocarbon groups having 12 or less carbon atoms, halogen atoms, and alkoxy groups having 12 or less carbon atoms. Y^1 and Y^2 may be the same or different and represent a sulfur atom or a dialkylmethylene group having 12 or less carbon atoms. R^3 and R^4 may be the same or different and represent a hydrocarbon group having 20 or less carbon atoms optionally having a substituent. As the preferable substituent, alkoxy groups having 12 or less carbon atoms, carboxyl groups and sulfo group are listed. R^5 , R^6 , R^7 and R^8 may be the same or different, and represent a hydrogen atom or a hydrocarbon group having 12 or less carbon atoms. In view of availability of raw materials, a hydrogen atom is preferable. Z_a^- represents a counter anion. However, when a sulfo group is substituted on any of R^1 to R^8 , Z_a^- is not necessary. In view of storage stability of an application solution for a photosensitive layer, Z_a^- is preferably halogen ion, perchloric acid ion, tetrafluoroborate ion, hexafluorophosphate ion, or sulfonic acid ion, and particularly preferable, is perchloric acid ion, tetrafluoroborate ion or arylsulfonic acid ion.

[0132] As specific examples of the cyanine colorant of the general formula (a) which can be suitably used in the present invention, in addition to the specific examples shown below, those described in paragraphs [0017] to [0019] in Japanese Patent Application No. 11-310623, those described in paragraphs [0012] to [0038] in Japanese Patent Application No. 2000-224031, and those described in paragraphs [0012] to [0023] in Japanese Patent Application No. 2000-211147 are listed.

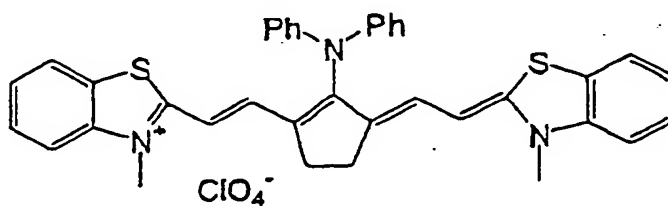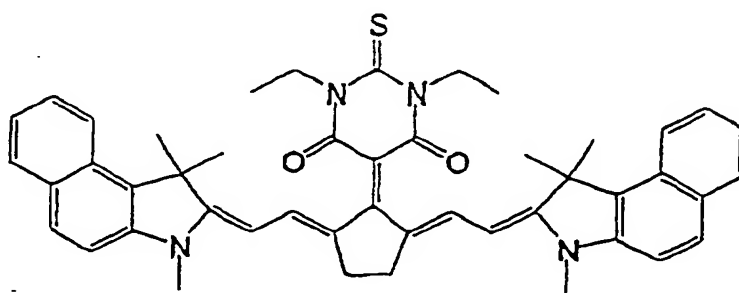


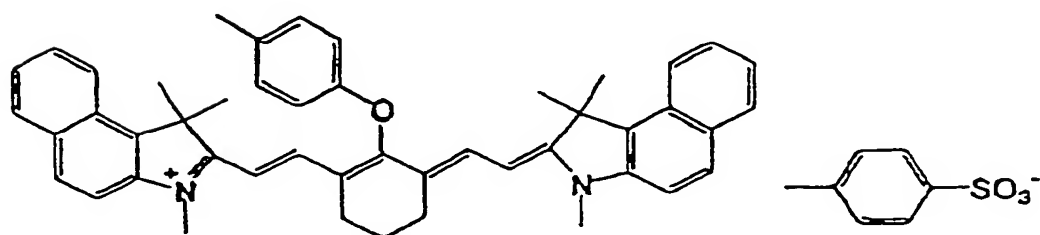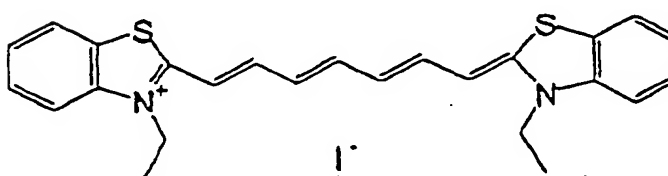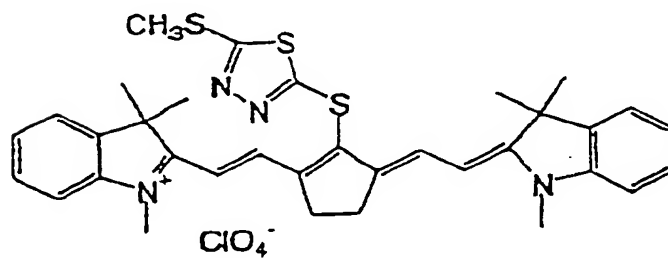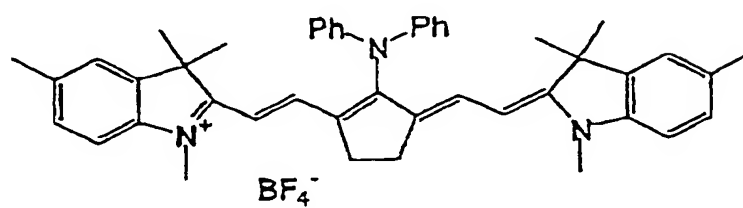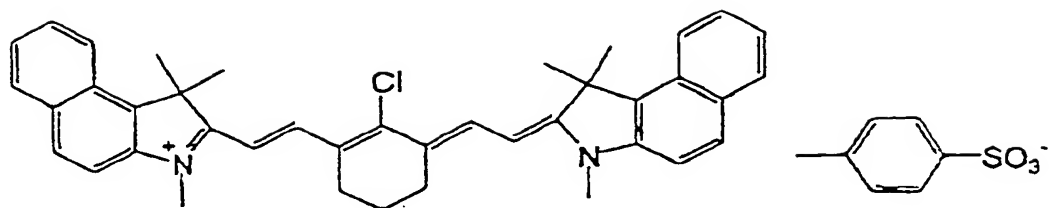

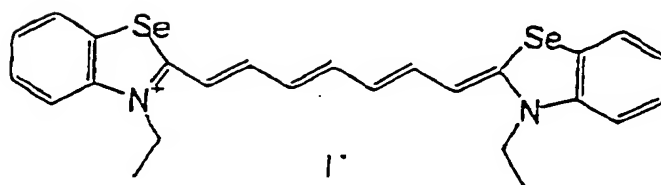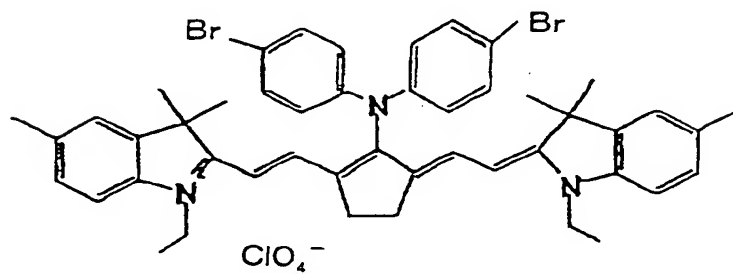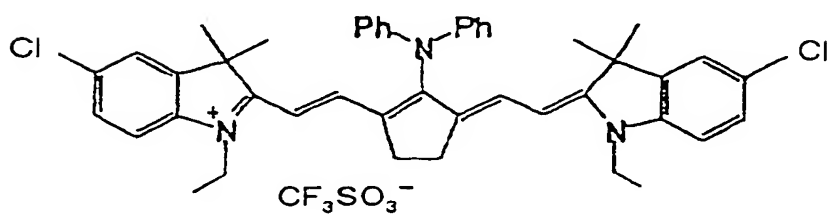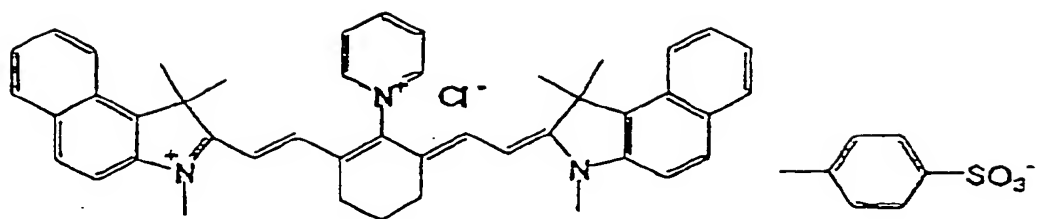


5

10

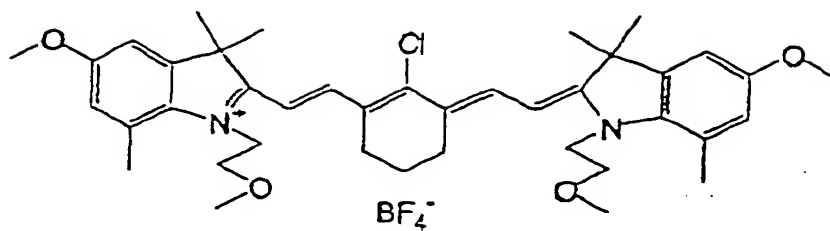


15

20

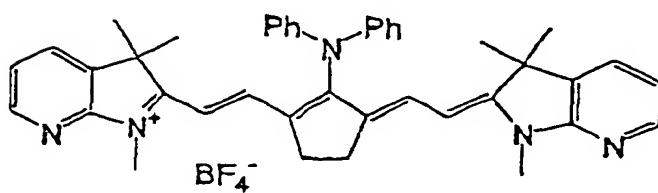

25


30

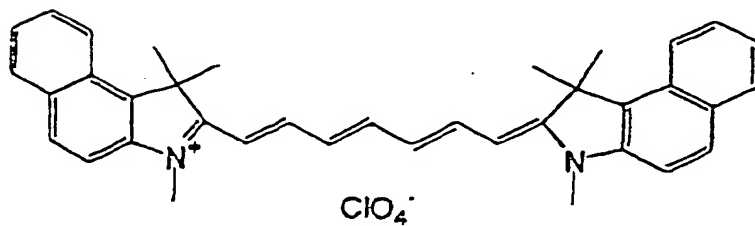

35

40


45

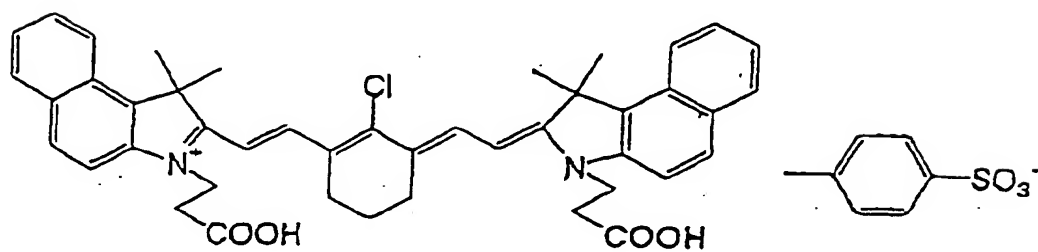

50




[0133] The general formula (b) is shown below.

55

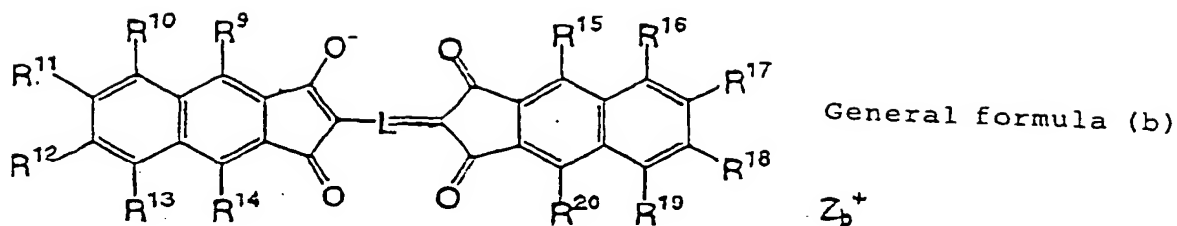


[0134] In the general formula (b), L represents a methine chain which may have substituent(s), wherein the substituents may be linked each other to form a ring. Z_b^+ represents a counter cation. As preferable cations, ammonium, iodonium, sulfonium, phosphonium, pyridinium and alkali metal cation (Ni^+ , K^+ and Li^+) can be listed. R^9 to R^{14} and R^{15} to R^{20} independently represent a hydrogen atom, a halogen atom, a cyano group, an alkyl group, an aryl group, an alkenyl group, an alkynyl group, a carbonyl group, a thio group, a sulfonyl group, a sulfinyl group, an oxy group or an amino group, wherein two or three of which may be combined or may be linked together to form a ring. In view of availability of raw materials and effect, those represented by the general formula (b) wherein L represents a methine chain having 7 conjugated carbon atom, or those represented by the general formula (b) wherein all of R^9 to R^{14} and R^{15} to R^{20} represents a hydrogen atom are preferable.

[0135] Followings are specific examples of the colorant of the general formula (b) which can be suitably used in the present invention.

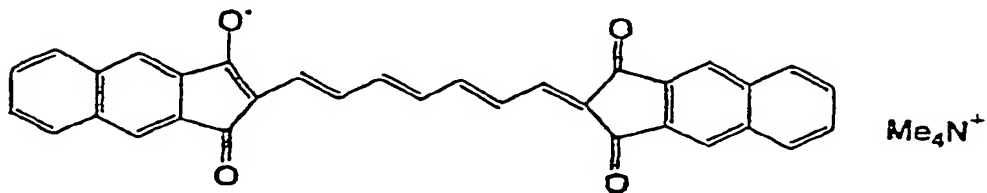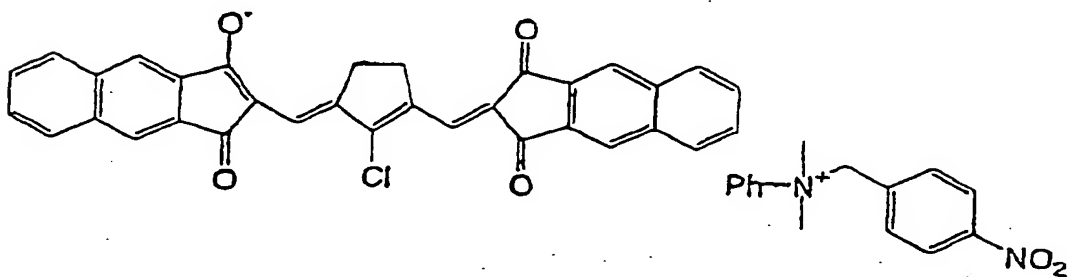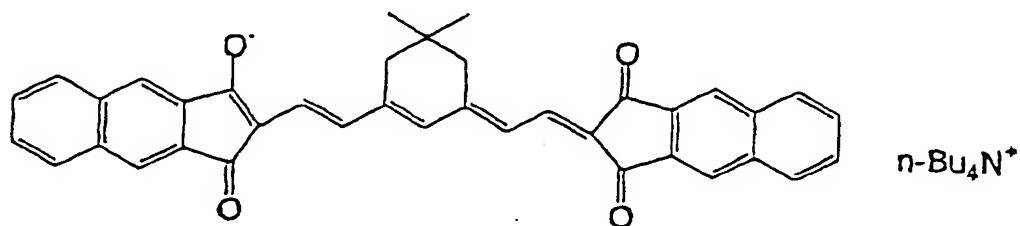




[0136] The general formula (c) is shown below.


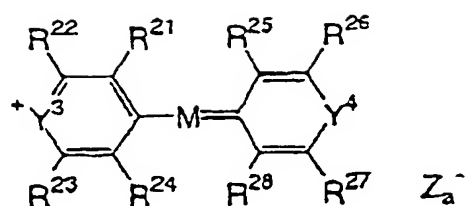


General formula (c)


[0137] In the general formula (c), Y^3 and Y^4 independently represent an oxygen atom, a sulfur atom, a selenium atom or a tellurium atom. M represents a methine chain having 5 or more of conjugated carbon atoms. R^{21} to R^{24} and R^{25} to R^{28} may be the same or different, and represent hydrogen atom(s), halogen atom(s), cyano group(s), alkyl group(s), aryl group(s), alkenyl group(s), alkynyl group(s), carbonyl group(s), thio group(s), sulfonyl group(s), sulfinyl group(s), oxy group(s) or amino group(s). Z_a^- represents a counter anion, which is the same as that shown in the general formula (a).

[0138] Followings are specific examples of the colorant of the general formula (c) which can be suitably used in the present invention.

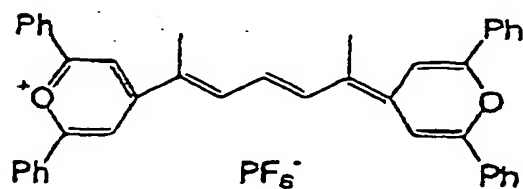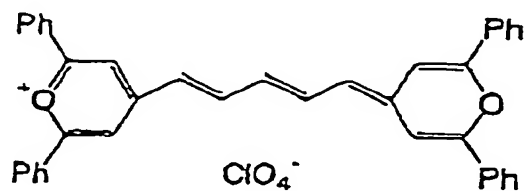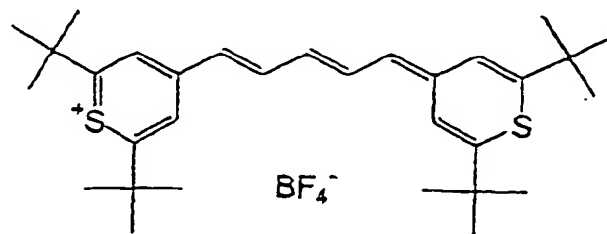

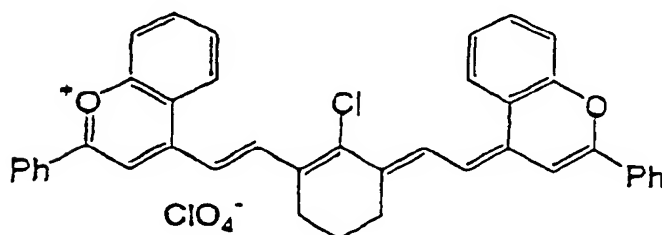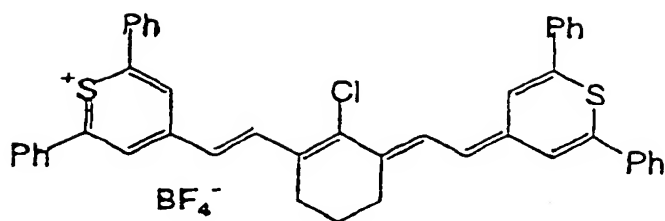


[0139] The general formula (d) is shown below.

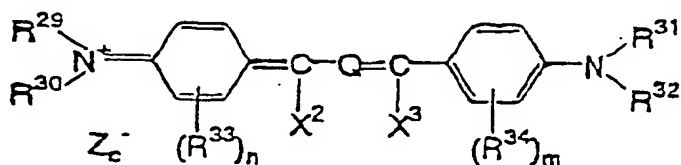


General formula (d)


[0140] In the general formula (d), R^{29} to R^{31} independently represent a hydrogen atom, an alkyl group or an aryl group. R^{33} and R^{34} independently represent an alkyl group, a substituted oxy group or a halogen atom. n and m independently represent an integer from 0 to 4. R^{29} and R^{30} may be linked to form a ring. R^{31} and R^{32} may be linked to form a ring. R^{29} and/or R^{30} may be linked with R^{33} to form a ring. R^{31} and/or R^{32} may be linked with R^{34} to form a ring. When plurality of groups are represented by R^{33} and/or R^{34} , a ring may be formed within such plurality of groups of R^{33} (R^{34}). X^1 and X^2 independently represent hydrogen atom, alkyl group or aryl group. At least one of X^1 and X^2 independently represents a hydrogen atom or an alkyl group. Q represents a trimethine group or a pentamethine group which may have substituent(s), and may form a ring by adding a divalent organic acid. Z_c^- represents a counter anion, which is the same as Z_a^- shown in the general formula (a).

[0141] Followings are specific examples of the colorant of the general formula (d) which can be suitably used in the present invention.



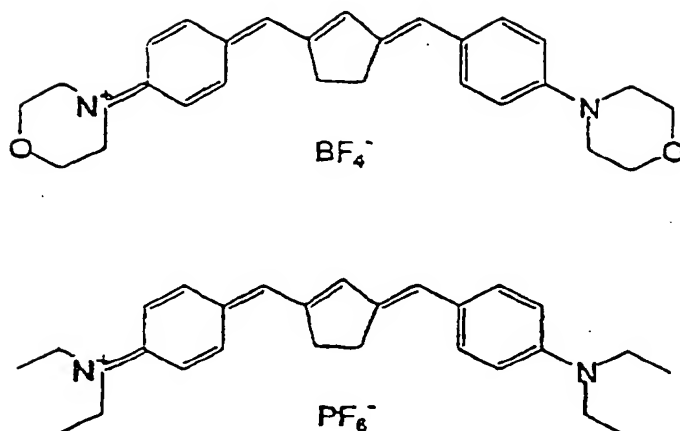



[0142] The general formula (e) is shown below.

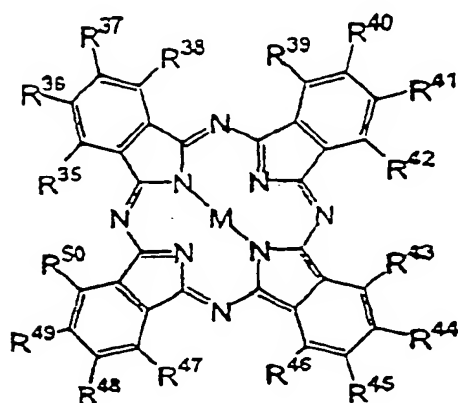

General formula (e)

[0143] In the general formula (e), R^{35} to R^{50} independently represent a hydrogen atom, a halogen atom, a cyano group, an alkyl group, an aryl group, an alkenyl group, an alkynyl group, a hydroxy group, a carbonyl group, a thio group, a sulfonyl group, a sulfinyl group, an oxy group, an amino group or an onium salt construction that may have substituent(s). M represents two hydrogen atoms, a metal atom, a halometal group or an oxy group, wherein said metal atom may be selected from the group consisting of atoms of IA group, atoms of IIA group, atoms of IIIB group, atoms of IVB group, transition metals of first, second and third period of periodic table, and lanthanoid elements. Among these preferable metal atoms, a copper atom, a magnesium atom, an iron atom, a zinc atom, a cobalt atom, an aluminum atom, a titanium atom and a vanadium atom can be preferably used.

[0144] Followings are specific examples of the colorant of the general formula (e) which can be suitably used in the present invention.

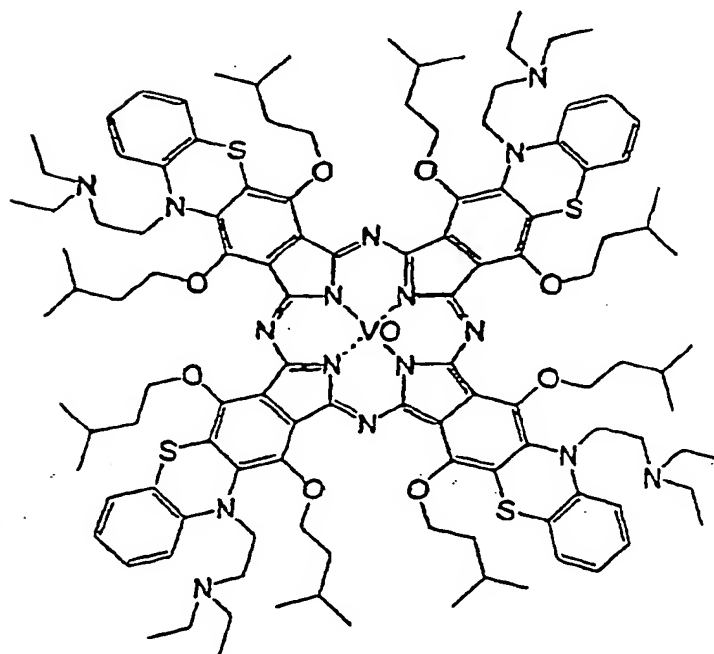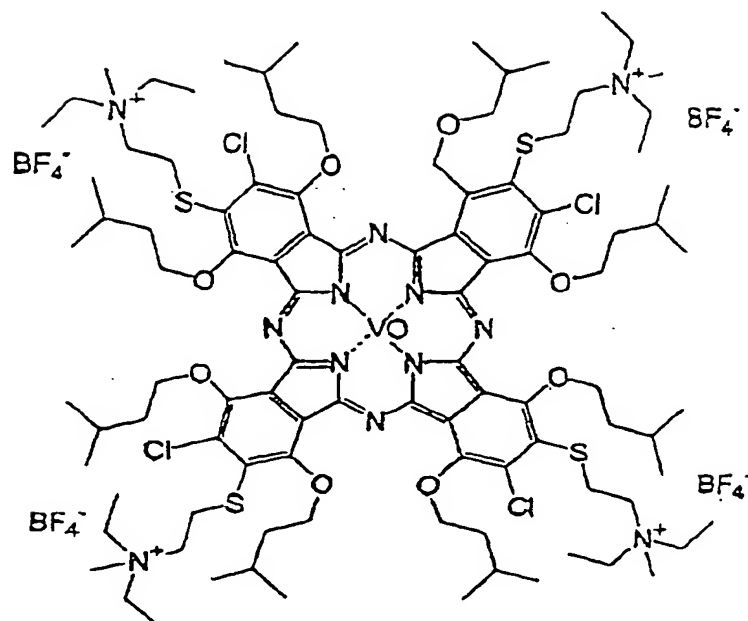

[0145] As the pigment used in the present invention, commercially available pigment, and pigments described in Color Index (C. I.) manual, "Saishin Ganryo Binran (Current Pigment Manual)" (edited by Nippon Ganryo Gijutsu Kyokai, 1977), "Saishin Ganryo Oyo Gijutsu (Current Pigment Application Technology)" (published by CMC, 1986), "Insatsu Inki Gijutsu (Printing Ink Technology)" (published by CMC, 1984) can be utilized.

[0146] As the pigments, black pigments, yellow pigments, orange pigments, brown pigments, red pigments, violet pigments, blue pigments, green pigments, fluorescent pigments, metal powder pigments, and additionally, polymer bond pigments, are listed. Specifically, insoluble azo pigments, azolake pigments, condensed azo pigments, chelate

azo pigments, phthalocyanine-based pigments, anthraquinone-based pigments, perylene and perynone-based pigments, thioindigo-based pigments, quinacridone-based pigments, dioxazine-based pigments, isoindolinone-based pigments, quinophthalone-based pigments, dyeing lake pigments, azine pigments, nitroso pigments, nitro pigments, natural pigments, fluorescent pigments, inorganic pigments, carbon black and the like can be used. Among these pigments, carbon black is preferable.

[0147] These pigments may be used without surface treatment, or may be surface-treated before use. The method of surface treatment may be a method of surface coating with a resin and wax, a method of adhering a surfactant, a method of bonding a reactive substance (for example, silane coupling agent, epoxy compound, polyisocyanate and the like) to the surface of a pigment, and the like. The above-mentioned surface treatment methods are described in "Kinzoku Sekken no Seitshitsu to Oyo (Nature and Application of Metal Soap)" (Sachi Publication), "Insatsu Inki Gijutsu (Printing Ink Technology)" (published by CMC, 1984), and "Saishin Ganryo Oyo Gijutsu (Current Pigment Application Technology)" (published by CMC, 1986).

[0148] The particle size of a pigment is preferably from 0.01 μm to 10 μm , further preferably from 0.05 μm to 1 μm , and particularly preferably from 0.1 μm to 1 μm . A particle size of a pigment of less than 0.01 μm is not preferable from the standpoint of instability of a dispersed substance in an application solution of an image photosensitizing layer, and a particle size of over 10 μm is not preferable from the standpoint of uniformity of an image photosensitive layer.

[0149] As the method of dispersing a pigment, known dispersing technologies used in production of ink, production of toners, and the like can be used. As the dispersing machine, an ultrasonic disperser, sand mill, attriter, pearl mill, super mill, ball mill, impeller, disperser, KD mill, colloid mill, Dynatron, triple screw roll mill, press kneader and the like are listed. The details are described in "Saishin Ganryo Oyo Gijutsu (Current Pigment Application Technology)" (published by CMC, 1986).

[0150] These light-heat converting agents may be used alone or in combination of two or more. In the standpoint of sensitivity, the dye represented by the general formula (a) is preferable. The cyanine dye represented by the general formula (a) which comprises diarylamino group is most preferable.

[0151] These light-heat converting agents are preferably added in a heat-sensitive composition in an amount of 0.1 to 20% by weight based on the total solid content. When the amount is far below this range, there is a tendency that sensitivity of change of properties by exposure lowers, and photosensitivity is not sufficiently obtained, and when too large, there is a tendency that uniformity and strength of film lower, namely, both cases are not preferable.

[0152] Next, the planographic printing plate of the present invention using the above-mentioned heat-sensitive composition will be described. In the planographic printing plate of the present invention, the above-mentioned heat-sensitive composition is used in a recording layer.

Recording Layer

[0153] First, a recording layer (photosensitive layer) having a function to form images in the planographic printing plate of the present invention will be described. The photosensitive layer of the planographic printing plate of the present invention comprises (I) an acid/radical polymerization initiator of the following general formula (A), (III) a light-heat converting agent, (II-a) a compound having a polymerizable unsaturated bond, and (IV) a binder polymer, and by irradiation with infrared laser, the light-heat converting agent (III) generates heat, and by the light of infrared laser or heat generated by the light-heat converting agent (III), an acid/radical generating agent (I) of the general formula (A) is decomposed to generate an acid or radical, and a hardening reaction of the compound (II-a) having a polymerizable unsaturated bond is promoted and exposed parts are hardened to form negative images which are image portions.

[0154] In formation of the photosensitive layer of the planographic printing plate of the present invention, the above-mentioned acid/radical polymerization initiator of the general formula (A) is contained preferably in an amount of 0.5 to 15% by weight based on the total amount of solid components constituting the photosensitive layer. This acid/radical generating agent is used in combination with a light-heat converting agent (III) described later, and when irradiated with infrared laser, it generates an acid or radical due to the light or heat or both of these energy forms, to initiate and promote polymerization of the compound (II-a) having a polymerizable unsaturated group.

[0155] As the compound (II-a) having a polymerizable unsaturated group used in a recording layer of a planographic printing plate, compounds as described in detail in the above-mentioned explanations of the compound (II) are used, and regarding the type of the compound, specific structures may be selected for the purpose of enhancing close adherence with a substrate, an over coat layer and the like described later, in addition to the above-mentioned requirements. Regarding the compounding ratio of the addition-polymerizable compound (II-a) in a heat-sensitive composition, a larger ratio is more advantageous from the standpoint of sensitivity, however, when too large, problems can occur such as occurrence of undesirable phase separation, problems in the production process due to stickiness of a heat-sensitive composition (for example, failures in production owing to transfer and adhesion of sensitive material components), occurrence of precipitation from a developing solution when a planographic printing plate is formed, and the like. From these viewpoints, preferable compounding ratio is, in many cases, from 5 to 80% by weight, and preferably

from 25 to 75% by weight based on the total amount of solid components of a composition constituting the recording layer. These may be used alone or in combination of two or more. Additionally, when an addition polymerizable compound is used, suitable structure, and compounding, and addition amounts of the compound can be optionally selected from the standpoints of extent of polymerization inhibition due to oxygen, resolution, fogging, change of refractive index, surface stickiness and the like, and in some cases, layer constitution and application methods such as priming and finishing can also be carried out.

[0156] In the planographic printing plate of the present invention, the above-mentioned light-heat converting agent (III) may be added to the same layer as other components, or to an other layer formed and when a negative image formation material is produced, it is preferable that the optical density at absorption maximum in a wavelength range of a photosensitive layer from 760 to 1200 nm is from 0.1 to 3.0. When the value is out of this range, sensitivity tends to lower. Since the optical density is determined by the addition amount of the above-mentioned light-heat converting agent (III) and the thickness of a recording layer, given optical density is obtained by controlling conditions of both parameters. The optical density of a recording layer can be measured by an ordinary method. As the measurement method, for example, a method in which on a transparent or white substrate, a recording layer having an appropriate pre-determined thickness in terms of application amount after drying and in a range required as a planographic printing plate is formed, and the optical density is measured by a transmission type optical density meter, a method in which a recording layer is formed on a reflective substrate such as aluminum and the like and then the reflection density is measured, and other methods are listed.

(IV) Binder which is water-insoluble and alkali aqueous solution-soluble.

[0157] In the planographic printing plate of the present invention, it is further preferable to use a binder polymer in a recording layer. A linear organic polymer is preferably included as the binder. Any such "linear organic polymer" may be used. Preferably, linear organic polymers which are soluble or swellable in water or weak alkaline water, or those which enable water development or weak alkaline water development, are selected. The linear organic polymer is selected and used, according to use not only as a film forming agent of a composition but also according to use as water, weak alkaline water or as an organic solvent developing agent. For example, when a water-soluble organic polymer is used, water development is possible. As such linear organic polymer, addition polymers having a carboxylic acid group on a side chain, for example, those described in JP-A No. 59-44515, JP-B Nos. 54-34327, 58012577, 54025957, JP-A Nos. 54-92723, 59-53836 and 59-71048, namely, methacrylic acid copolymers, acrylic acid copolymers, itaconic acid copolymer, crotonic acid copolymers, maleic acid copolymers, partially esterified maleic acid copolymers and the like are listed. Likewise, acidic cellulose derivatives having a carboxylic acid group on a side chain are listed. In addition, those obtained by adding a cyclic acid anhydride to addition polymers having a hydroxyl group, and the like are useful.

[0158] Particularly, among these compounds, [benzyl(meth)acrylate/(meth)acrylic acid/other addition-polymerizable vinyl monomer, if necessary] copolymers and [allyl(meth)acrylate/(meth)acrylic acid/other addition-polymerizable vinyl monomer, if necessary] copolymers are excellent in balance between film strength, sensitivity and developing property, and consequently suitable.

[0159] Urethane-based binder polymers having an acid group described in JP-B Nos. 7-12004, 7-120041, 7-120042 and 8-12424, JP-A Nos. 63-287944, 63-287947 and 1-271741, Japanese Patent Application No. 10-116232, and the like, are advantageous with respect to printing endurance and low exposure ability since these polymers are extremely excellent in strength.

[0160] Binders having an amide group described in JP-A No. 11-171907 have both excellent developing property and film strength, and are thus suitable.

[0161] Further, as other water-soluble linear organic polymers, polyvinylpyrrolidone, polyethylene oxide and the like are useful. Further, for enhancing the strength of a hardened film, alcohol-soluble nylon, polyethers of 2,2-bis-(4-hydroxyphenyl)propane and epichlorohydrin, and the like are also useful. These linear organic polymers can be mixed in suitable amount in the whole composition. When the amount mixed is over 90% by weight, preferable results are not obtained with regard to image strength and the like. This amount is preferably from 30 to 85% by weight. The ratio by weight of compounds having an ethylenically unsaturated double bond to linear organic polymers is preferably 1/9 to 7/3.

[0162] As the binder polymer used in the present invention, those substantially insoluble in water and soluble in alkaline aqueous solution are used. Therefore, in a developing solution, an organic solvent that is undesirable for environments is not used or the amount used thereof can be suppressed to an extremely low level. The acid value (acid content per 1 g of polymer is represented in terms of chemical grade number) and molecular weight of such a binder polymer is appropriately selected from the standpoints of image strength and developing property. The preferable acid value is from 0.4 to 3.0 meq/g and the preferable molecular weight is from 3000 to 500000, and more preferably, the acid value is from 0.6 to 2.0 and the molecular weight is from 10000 to 300000.

(V) Other components

[0163] In a composition constituting a recording layer of the planographic printing plate of the present invention, other components suitable for use, production methods thereof and the like can be further added appropriately. Examples of the preferable additives are given below.

(V-1) Co-sensitizer

[0164] The sensitivity can be further improved by using a certain kind of additive (hereinafter, referred to as co-sensitizer). Though the working mechanism of the co-sensitizer there is not clear, it is believed to be based on the following chemical process in some cases. Namely, it is estimated that various intermediate active species (radicals, cations) produced in light reaction initiated by a heat polymerization initiator and in the subsequent addition polymerization reaction are reacted with a co-sensitizer to produce a new active radical. These are roughly classified into (a) those which are reduced to produce an active radical, (b) those which are oxidized to produce an active radical, (c) a radical having lower activity which is reacted to be converted into a radical having higher activity, or to act as a chain transfer agent. However, in many cases there is no general explanation as to which of these groups each of the compounds belong.

(a) Compound which is reduced to produce an active radical

[0165] Compound having carbon-halogen bond: It is believed that a carbon-halogen bond is reductively broken to generate an active radical. Specifically, for example, trihalomethyl-s-triazines, trihalomethyloxaziazoles and the like can be suitably used.

[0166] Compound having nitrogen-nitrogen bond: It is believed that a nitrogen-nitrogen bond is reductively broken to generate an active radical. Specifically, hexaarylbiimidazoles and the like are suitably used.

[0167] Compound having oxygen-oxygen bond: It is believed that an oxygen-oxygen bond is reductively broken to generate an active radical. Specifically, organic peroxides and the like are suitably used.

[0168] Onium compound: It is believed that a carbon-hetero bond and an oxygen-nitrogen bond are reductively broken to generate an active radical. Specifically, diaryliodonium salts, triarylsulfonium salts, N-alkoxypyridinium (azinium) salts and the like are suitably used.

[0169] Pherocene, iron allene complexes: An active radical can be reductively produced.

(b) Compound which is oxidized to produce an active radical

[0170] Alkylate compound: It is believed that a carbon-hetero bond is oxidatively decomposed to produce an active radical. Specifically, for example, triarylalkylborates are suitably used.

[0171] Alkylamine compound: It is believed that a C-X bond on a carbon adjacent to nitrogen is broken by oxidation to produce an active radical. As X, a hydrogen atom, carboxyl group, trimethylsilyl group, benzyl group and the like are suitable. Specifically, for example, ethanolamines, N-phenylglycines, N-trimethylsilylmethylanilines and the like are listed.

[0172] Sulfur-containing, tin-containing compound: Compounds obtained by substituting a sulfur atom and tin atom for a nitrogen atom on the above-mentioned amines can form an active radical by the same action. Compounds having an S-S bond are also known to gain sensitivity by breakage of the S-S bond.

[0173] α -substituted methylcarbonyl compound: An active radical can be produced by oxidation due to the breaking of a bond between carbonyl- α carbon. Those obtained by substituting oxime ether for carbonyl also manifest the same action. Specifically, 2-alkyl-1-[4-(alkylthio)phenyl]-2-morpholinopronone-1s, and oxime ethers obtained by reacting the pronones with hydroxyamines, then, etherifying N-OH, are listed.

[0174] Sulfine salts: An active radical can be reductively produced. Specifically, sodium arylsulfinate and the like are listed.

(c) A Compound which is reacted with a radical to be converted into a highly active radical, or which acts as chain transfer agent: For example, a group of compounds having SH, PH, SiH or GeH in the molecule are used. These can give hydrogen to lower active radical species to form a radical, or can be oxidized, then, de-protonated to produce a radical. Specifically, for example, 2-mercaptobenzimidazoles and the like are listed.

[0175] Many specific examples of these co-sensitizer are described, for example, in JP-A No. 9-236913, as additives for improving sensitivity, and these can be applied also in the present invention.

[0176] These co-sensitizer can be used alone or in combination of two or more. The amount used thereof is from 0.05 to 100 parts by weight, preferably from 1 to 80 parts by weight, further preferably from 3 to 50 parts by weight based on 100 parts by weight of a compound having an ethylenically unsaturated double bond.

(V-2) Polymerization inhibitor

[0177] Further, in the present invention, in addition to the above-mentioned basic components, it is desirable to add a small amount of heat polymerization inhibitor in order to inhibit unnecessary heat polymerization of a compound having a polymerizable ethylenically unsaturated double bond in production or storage of a photosensitive composition. Examples of the suitable heat polymerization inhibitor include, hydroquinone, p-methoxyphenol, di-t-butyl-p-cresol, pyrogallol, t-butylcatechol, benzoquinone, 4,4'-thiobis(3-methyl-6-t-butylphenol), 2,2'-methylenebis(4-methyl-6-t-butylphenyl), N-nitrosophenylhydroxylamine primary cerium, and the like. The amount of the heat polymerization inhibitor added is preferably from about 0.01 to about 5% by weight based on the total composition weight. If necessary, for preventing polymerization inhibition by oxygen, a higher fatty acid derivative such as behenic acid and behenic amide and the like may be added and allowed to be present locally on the surface of a photosensitive layer in a process of drying after application onto a substrate and the like, when a planographic printing plate is produced. The amount of the higher fatty acid derivative added is preferably from about 0.5 to about 10% by weight based on the whole composition.

(V-3) Coloring agent and the like

[0178] Further, when the photosensitive composition of the present invention is used in a planographic printing plate, a dye or pigment may be added for the purpose of coloring a photosensitive layer thereof. By adding the dye or pigment, so-called plate inspection properties such as visibility of the plate after it is produced, and the ease of using an image concentration measuring device are improved. As the coloring agent, use of a pigment is particularly preferable since most dyes cause reduction in sensitivity of a photopolymerization photosensitive layer. Specific examples thereof include pigments such as phthalocyanine pigments, azo pigments, carbon black, titanium oxide and the like, and dyes such as ethyl violet, crystal violet, azo dyes, anthraquinone dyes, cyanine dyes and the like. The amount of the dye and pigment added is preferably from about 0.5 to about 5% by weight based on the whole composition.

(V-4) Other additives

[0179] Further, when the photosensitive composition of the present invention is used in a planographic printing plate, known additives such as inorganic fillers, other plasticizers, sensitizers which can improve ink adhering property on the surface of a photosensitive layer, and the like, may be added to improved physical properties of a hardened film.

[0180] As the plasticizer, for example, dioctyl phthalate, didodecyl phthalate, triethylene glycol dicaprylate, dioctyl adipate, dibutyl sebacate, triacetyl glycerin and the like are listed, and when a binder is used, it can be added in an amount of 10% by weight or less based on the total weight of a compound having an ethylenically unsaturated double bond and a binder.

[0181] Further, in order to reinforce heating and exposing effects after development, for the purpose of improving film strength (printing endurance) described later, a UV initiator, aging cross-linking agent and the like, to reinforce heating and exposing effects after development, for the purpose of improving film strength (printing endurance) described later, can also be added.

[0182] In addition, additives can be added and an intermediate layer can be provided for improving close adherence between a photosensitive layer and a substrate, and enhancing developing and removing ability of a non-exposed photosensitive layer. For example, close adherence can be improved and printing endurance can be enhanced by addition and priming of a compound having relatively strong mutual action with a substrate such as a compound having a diazonium structure, a phosphon compound and the like, and on the other hand, developing property of non-image portions is improved and improvement of staining property is possible by addition and priming of a hydrophilic polymer such as polyacrylic acid and polysulfonic acid.

[0183] For providing a planographic printing plate, when the photosensitive composition of the present invention is applied on a substrate, the composition is dissolved in various organic solvents before being used. Examples of the solvent used herein are, acetone, methyl ethyl ketone, cyclohexane, ethyl acetate, ethylene dichloride, tetrahydrofuran, toluene, ethylene glycol monomethyl ether, ethylene glycol monoethyl ether, ethylene glycol dimethyl ether, propylene glycol monomethyl ether, propylene glycol monoethyl ether, acetylacetone, cyclohexanone, diacetone alcohol, ethylene glycol monomethyl ether acetate, ethylene glycol ethyl ether acetate, ethylene glycol monoisopropyl ether, ethylene glycol monobutyl ether acetate, 3-methoxypropanol, methoxy methoxy ethanol, diethylene glycol monomethyl ether, diethylene glycol monoethyl ether, diethylene glycol dimethyl ether, diethylene glycol diethyl ether, propylene glycol monomethyl ether acetate, propylene glycol monoethyl ether acetate, 3-methoxy propyl acetate, N,N-dimethylformamide, dimethylsulfoxide, γ -butyrolactone, methyl lactate, ethyl lactate and the like. These solvents can be used alone or in combination. The concentration of solid components in an application solution is suitably from 2 to 50% by weight.

[0184] It is desirable to appropriately select the amount applied on the substrate of the above-mentioned photosen-

sitive layer in accordance with use, in view of influences such as sensitivity of a photosensitive layer, developing property, strength and printing endurance of an exposed film, and the like. When the application amount is too small, printing endurance is insufficient. On the other hand, when the application amount is too large, sensitivity decreases, exposure takes much time, and in addition, developing treatment also requires a longer period of time, and is thus undesirable.

The application amount suitable in the planographic printing plate of the present invention is from about 0.1 to about 10 g/m² in terms of weight after drying, in general. More preferably, it is from 0.5 to 5 g/m².

Protective layer

[0185] In the planographic printing plate of the present invention, if necessary, a protective layer can be provided on a recording layer containing a photopolymerizable compound. Such a planographic printing plate is usually exposed in air, and the protective layer prevents mixing into a photosensitive layer of a compound having lower molecular weight such as basic substances and oxygen present in air, which inhibits image formation reaction in a photosensitive layer which takes place due to, occurred by exposure, in a photosensitive layer, and prevents inhibition of image formation reaction by exposure in air. Therefore, properties desired for such a protective layer are lot permeability of a compound having lower molecular weight such as oxygen and the like, and further, it is desirable that transmission property of light used for exposure is good, close adherence with a photosensitive layer is excellent, and the protective layer can be easily removed in a developing process after exposure.

[0186] Such modifications of a protective layer have been conventionally conducted, and described in detail in USP No. 3,458,311 and JP-A No. 55-49729. As materials which can be used in the protective layer, for example, water-soluble polymer compound having relatively excellent crystallinity are advantageously used, and specifically, water-soluble polymers such as polyvinyl alcohol, polyvinyl pyrrolidone, acidic celluloses, gelatin, gum Arabic, polyacrylic acid and the like are known, and of these, use of polyvinyl alcohol as a main component gives most preferable results from the standpoints of basic properties such as oxygen-blocking property and development-removing property. Polyvinyl alcohol used in the protective layer may be partially substituted with ester, ether and acetal providing it contains an unsubstituted vinyl alcohol unit for giving oxygen blocking property and water-solubility required. Further, in a similar manner, it may partially contain other copolymerization components.

[0187] As specific examples of polyvinyl alcohol, those 71 to 100% of which have been hydrolyzed 71 to 100% and which have a molecular weight from 300 to 2400 are listed. Specific examples are PVA-105, PVA-110, PVA-117, PVA-117H, PVA-120, PVA-124, PVA-124H, PVA-CS, PVA-CST, PVA-HC, PVA-203, PVA-204, PVA-205, PVA-210, PVA-217, PVA-220, PVA-224, PVA-217EE, PVA-217E, PVA-220E, PVA-224E, PVA-405, PVA-420, PVA-613, L-8 and the like (trade names; all manufactured by Kuraray Co., Ltd.).

[0188] Components of a protective layer (selection of PVA, use of additives), application amount, and the like are selected in view of fogging property, close adherence and scratch-resistance in addition to oxygen-blocking property and development-removing property. In general, when the hydrolysis rate of PVA used is higher (when content of non-substituted vinyl alcohol unit in a protective layer is higher) and when the film thickness is larger, oxygen-blocking property increases, and this is advantageous from the standpoint of sensitivity. However, if the increase in oxygen-blocking property is extreme, unnecessary polymerization reaction occurs in production and storage, and problems occur such as unnecessary fogging and broadening of image lines in image exposure. Further, close adherence with image portions and scratch resistance are also extremely important for handling of the plate. Namely, when a hydrophilic layer composed of a water-soluble polymer is laminated on a lipophilic polymerization layer, film peeling due to poor adhesion tends to occur, and peeled parts cause defects such as poor film hardening and the like by inhibition of oxygen polymerization.

[0189] On the other hand, various suggestions have been made to improve adhesion between these two layers, USP Nos. 292, 501 and 44,563 describe obtaining sufficient adhesion by mixing acrylic emulsion or water-insoluble vinylpyrrolidone-vinyl acetate copolymer and the like in an amount of 20 to 60% by weight into a hydrophilic polymer composed mainly of polyvinyl alcohols, and laminating the mixture on a polymerization layer. Any of these known techniques can be applied to the protective layer of the present invention. The method of applying such a protective layer is described in detail in, for example, USP No. 3,458,311 and JP-A No. 55-49729.

[0190] Further, the protective layer can be endowed with other functions. For example, safe light becomes made suitable for use without causing reduction in sensitivity by addition of a coloring agent (water-soluble dye and the like) which gives excellent transmission of light used for exposure (for example, infrared laser having a wavelength from 760 to 1200 nm) and can efficiently absorb light having wavelengths independent of exposure.

Substrate

[0191] The substrate used in the planographic printing plate of the present invention is not particularly restricted providing it is a dimensionally stable plate, and there are listed, for example, paper, paper laminated with plastics (for

example, polyethylene, polypropylene, polystyrene and the like). metal plates (for example, aluminum, zinc, copper and the like), and plastic films (for example, cellulose diacetate, cellulose triacetate, cellulose propionate, cellulose butyrate, cellulose acetate butyrate, cellulose nitrate, polyethylene terephthalate, polyethylene, polystyrene, polypropylene, polycarbonate, polyvinyl acetal and the like). These may be a sheet of single component such as a resin film and metal plate and the like, or a laminate composed of two or more materials, and for example, paper and plastic films laminated or deposited with metal as described above, laminated sheets made of different plastic films.

[0192] As the above-mentioned substrate, polyester films or aluminum plates are preferable, and of them, an aluminum plate that has excellent dimension stability and is relatively cheap is particularly preferable. The suitable aluminum plate is a pure aluminum plate or an alloy plate composed mainly of aluminum and containing traces of foreign elements, and further, plastic films laminated or deposited with aluminum may also be used. As the foreign elements contained in an aluminum alloy, silicon, iron, manganese, copper, magnesium, chromium, zinc, bismuth, nickel, titanium and the like are listed. The content of the foreign elements in the alloy is at most 10% by weight or less. In the present invention, particularly suitable aluminum is pure aluminum, however, since completely pure aluminum is not produced easily from the standpoint of refining technology, those containing a trace amount of foreign elements may also be used. The aluminum plate thus applied to the present invention does not have a formulation limited within a specific range, and aluminum plates made of conventionally known and used materials can be appropriately utilized.

[0193] The thickness of the above-mentioned aluminum plate is from about 0.1 to 0.6 mm, preferably from 0.15 to 0.4 mm, particularly preferably from 0.2 to 0.3 mm.

[0194] Prior to roughening of an aluminum plate, if required, de-greasing treatment is conducted using a surfactant, organic solvent or alkaline aqueous solution and the like, for example, for in order to remove rolling oil on the surface thereof.

[0195] The surface roughening treatment of the surface of an aluminum plate is conducted by various methods, and for example, a mechanical roughening method, a method of dissolving and roughening the surface electrochemically, and a method of selectively dissolving the surface, are used. As the mechanical method, known methods such as a ball polishing method, brush polishing method, buff polishing method and the like can be used. As the electrochemical roughening method, methods using alternating current or direct current in a hydrochloric acid or nitric acid electrolyte solution are used. Further, methods using both of them in combination can also be used as disclosed in JP-A No. 54-63902.

[0196] An aluminum plate thus roughened can be subjected, if necessary, to alkali etching treatment and neutralization treatment, and for enhancing water-retention and abrasion-resistance of the surface, to anodizing treatment. As the electrolytes used for anodizing treatment of an aluminum plate, various electrolytes forming a porous oxide film can be used, and in general, sulfuric acid, phosphoric acid, oxalic acid, chromic acid or a mixed acid thereof can be used. The concentrations of these electrolytes are appropriately determined depending on the kinds of the electrolytes.

[0197] The treating conditions for anodizing can not universally be specified since they vary depending on electrolytes used, and in general, it is suitable that the concentration of electrolytes is from 1 to 80% by weight based on the solution, the liquid temperature is from 5 to 70°C, the current density is from 5 to 60 A/dm², the voltage is from 1 to 100 V, and the electrolysis time is from 10 seconds to 5 minutes.

[0198] The amount of an anodized film is suitably 1.0 g/m² or more, more preferably from 2.0 to 6.0 g/m². If the amount of an anodized film is less than 1.0 g/m², printing endurance is insufficient, non-image portions of a planographic printing plate are scratched easily, consequently, so-called "scratch staining" in which ink is adhered to scratched parts in printing tends to occur.

[0199] Such anodizing treatment is performed on a surface used for printing of a substrate of a planographic printing plate, and in general that an anodized film is formed also on the rear surface in an amount of 0.01 to 3 g/m² by turning the electric power lines to the rear.

[0200] The hydrophilization treatment of the surface of a substrate is performed after the above-mentioned anodizing treatment, and conventional treating methods can be used. As such hydrophilization treatment, an alkali metal silicate (for example, sodium silicate aqueous solution) method as disclosed in USP Nos. 2,714,066, 3,181,561, 3,280,734 and 3,902,734 is used. In this method, a substrate is immersed in a sodium silicate aqueous solution or subjected to electrolysis treatment. In addition, treatment with potassium fluorozirconate disclosed in JP-B No. 36-22063, and polyvinylphosphonic acid disclosed in USP No. 3,276,868, 4,153,461 and 4,689,272, and other methods are used.

[0201] Among them, the particularly preferable hydrophilization treatment in the present invention is the silicate treatment. The silicate treatment will be described below.

[0202] An anodized film of an aluminum plate on which the above-mentioned treatment has been performed is immersed in an aqueous solution having an alkali metal silicate content from 0.1 to 30% by weight, preferably from 0.5 to 10% by weight and having a pH from 10 to 13 at 25°C, at a temperatures from 15 to 80°C for 0.5 to 120 seconds. When pH of an alkali metal silicate aqueous solution is less than 10, the solution is gelled, and when over 13.0, an oxidized film is dissolved. As the alkali metal silicate used in the present invention, sodium silicate, potassium silicate, lithium silicate and the like are used. As the hydroxide used for enhancing pH of the alkali metal silicate aqueous

solution, sodium hydroxide, potassium hydroxide, lithium hydroxide and the like are listed. In the above-described treating solution, an alkaline earth metal salt or IVB metal salt may be compounded. As the alkaline earth metal salt, nitrates salts such as calcium nitrate, strontium nitrate, magnesium nitrate, barium nitrate and the like, and water-soluble salts such as sulfate salts, hydrochlorides, phosphate salts, acetate salts, oxalate salts, borate salts and the like, are listed. As the IVB metal salt, titanium tetrachloride, titanium trichloride, potassium fluorotitanate, potassium oxalate titanate, titanium sulfate, titanium tetraiodide, zirconium chloride oxide, zirconium dioxide, zirconium oxychloride, zirconium tetrachloride and the like are listed. The alkaline earth metal salts and IVB metal salts can be used alone or in combination of two or more. The amount of these metal salts is preferably from 0.01 to 10% by weight, and further preferably from 0.05 to 5.0% by weight.

[0203] By the silicate salt treatment, hydrophilicity on the surface of an aluminum plate is further improved, consequently, in printing, ink is not easily adhered to non-image portions, leading to improvement in anti-staining ability.

[0204] If necessary, a back coat is provided on the rear surface of a substrate. As the back coat, there are preferably used coating layers made of a metal oxide obtained by hydrolysis and polycondensation of organic polymer compounds described in JP-A No. 5-5885 and organic or inorganic metal compounds described in JP-A No. 6-35174.

[0205] Regarding these coating layers, alkoxide compounds of silicon such as $\text{Si}(\text{OCH}_3)_4$, $\text{Si}(\text{OC}_2\text{H}_5)_4$, $\text{Si}(\text{OC}_3\text{H}_7)_4$, $\text{Si}(\text{OC}_4\text{H}_9)_4$ and the like are available at low cost, and coating layers of metal oxides obtained from them are excellent in development-resistance and particularly preferable.

Exposure

[0206] As described above, the planographic printing plate of the present invention can be made. This planographic printing plate is exposed image-wise to solid laser and semiconductor laser emitting infrared ray having a wavelength from 760 nm to 1200 nm. In the present invention, developing treatment may be effected directly after laser irradiation, however, heating treatment can also be conducted between the laser irradiation process and the developing process.

The heating treatment is preferably conducted at a temperature from 80 to 150°C for from 10 seconds to 5 minutes. By this heating treatment, laser energy required for recording, in laser irradiation, can be reduced.

Development solution

[0207] When a photosensitive material using the photosensitive composition of the present invention is used as an image formation material, usually, after image exposure, non-exposed parts of a photosensitive layer are removed by a development solution, to give images. As the preferable development solution when these photopolymerizable compositions are used for production of planographic printing plates, development solutions described in JP-B No. 57-7427 are listed, and aqueous solutions of inorganic alkali agents such as sodium silicate, potassium silicate, sodium hydroxide, potassium hydroxide, lithium hydroxide, tribasic sodium phosphate, dibasic sodium phosphate, tribasic ammonium phosphate, dibasic ammonium phosphate, sodium metasilicate, sodium hydrogen carbonate, ammonia water and the like and organic alkali agents such as monoethanolamine or diethanolamine and the like, are suitable. Materials are added so that such an alkali solution has a concentration of from 0.1 to 10% by weight, preferably from 0.5 to 5% by weight.

[0208] Further, such an alkaline aqueous solution, if necessary, contains a small amount of a surfactant and an organic solvent such as benzyl alcohol, 2-phenoxyethanol, 2-butoxyethanol and the like. For example, those described in USP Nos. 3375171 and 3615480 are listed.

[0209] Furthermore, development solutions described in JP-A Nos. 50-26601, 58-54341, 56-39464 and 56-42860 are also excellent.

[0210] The planographic printing plate obtained as described above can be subjected to a printing process after desensitizing gum is applied on the plate if necessary, and when a planographic printing plate having higher printing endurance is desired, burning treatment is performed.

[0211] When the planographic printing plate is subjected to burning, treatment with smoothing liquid as described in JP-N Nos. 61-2518, 55-28062, 62-31859 and 61-159655 is preferably conducted before burning.

[0212] As this method, a method in which the above-mentioned smoothing liquid is applied on a planographic printing plate by sponge or absorbent cotton impregnated with the smoothing liquid, or the printing plate is immersed in a vat filled with the smoothing solution to effect application, a method of application with an automatic coated, and other methods, are applied. Further, a desirable effect is obtained by making the application amount uniform by squeezing or by using squeegee roller after application.

[0213] The planographic printing plate which has been burn-treated can be subjected, if necessary, appropriate to conventionally conducted treatments such as washing with water, gum drawing and the like, and when smoothing liquid containing a water-soluble polymer compound and the like is used, so-called de-sensitizing treatments such as gum drawing and the like can be omitted.

[0214] Planographic printing plates obtained by such treatments are applied to an offset printing machine and the like, and used in printing in large numbers.

EXAMPLES

[0215] The following examples illustrate the present invention in-detail, but they do not limit the scope of the present invention.

Examples 1 to 53, Comparative Examples 1 to 12

1. Production of substrate [A] and substrate [B]

[0216] An aluminum plate having a thickness of 0.3 mm was degreased by trichloroethylene, then, the surface thereof was sand-blasted using a nylon brush and a pumice-water suspension of 400 mesh, and washed sufficiently with water. This plate was immersed in a 25% aqueous sodium hydroxide solution at 45°C for 9 seconds to effect etching, and washed with water, then, further immersed in a 20% nitric acid for 20 seconds, and washed with water. The etched amount of the sand-blasted surface in this procedure was about 3 g/m². Then, this plate was treated at a current density of 15 A/dm² using 7% sulfuric acid as an electrolyte to form thereon a direct current electrode oxidized film of 3 g/m², then, washed with water, and dried to produce a substrate [A].

[0217] The substrate [A] was treated with a 2 wt% aqueous solution of sodium silicate for 15 seconds, and washed with water to produce a substrate [B].

2. Production of substrate [C]

[0218] The surface of an aluminum plate having a thickness of 0.30 mm was sand-blasted using a nylon brush and a water suspension of pumicestone of 400 mesh, and washed sufficiently with water. This plate was immersed in a 10 wt% aqueous sodium hydroxide solution at 70°C for 60 seconds to effect etching, and washed with flowing water, then, neutralized with 20 wt% nitric acid, and washed with water. This was subjected to an electrolytic roughening treatment with an electric quantity at an anode of 160 coulomb/dm² in a 1 wt% nitric acid aqueous solution using an alternation waveform current of sine waves under a condition of $V_A = 12.7$ V. The surface roughness thereof was measured to find it was 0.6 μ m (Ra indication). Subsequently, it was immersed in a 30 wt% nitric acid aqueous solution and desmutted at 55°C for 2 minutes, then, subjected to an anodizing treatment for 2 minutes so that the thickness of the anodized film was 2.7 g/m², at a current density of 2 A/dm² in a 20 wt% sulfuric acid aqueous solution.

[0219] Next, a liquid composition (sol liquid) according to an SG method was prepared by the following procedure.

Sol solution

[0220]

- Methanol 130 g
- Water 20 g
- 85 wt% Phosphoric acid 16 g
- Tetraethoxysilane 50 g
- 3-Methacryloxypropyltrimethoxysilane 60 g

[0221] The above-mentioned compounds were mixed, and stirred. After about 5 minutes, heat generation was confirmed. After reaction for 60 minutes, the content was put in another vessel, and to this was added 3000 g of methanol to obtain sol liquid.

[0222] This sol liquid was diluted with methanol/ethylene glycol = 9/1 (ratio by weight), and applied so that the amount of Si on a substrate was 3 mg/m², and dried at 100°C for 1 minute to obtain a substrate [C].

Formation of planographic printing plate

[0223] On the substrate [A], substrate [B] and substrate [C] produced as described above, the following photosensitive layer application solution was applied so the amount applied was 1.5 g/cm², to obtain planographic printing plates of Examples 1 to 50. Substrates, (I) acid/radical generating agents (indicated as polymerization initiator), (II) light-heat converting agents, (III) compounds having a polymerizable unsaturated group (indicated as addition polymerizable compound) and (IV) binders, used, are as shown in the following Tables 1 to 3.

[0224] The compositions of the photosensitive application solutions are as described below.

- Addition polymerizable compounds
(compounds in Tables 1 to 3) 1.5 g
- 5 • Binders (compounds in Tables 1 to 3) 2.0 g
- Light-heat converting agents
(compounds in Tables 1 to 3) 0.1 g
- Polymerization initiators
(compounds in Tables 1 to 3) 0.2 g
- 10 • Fluorine-based nonionic surfactant (trade name: Megafac F-177, Dainippon Ink & Chemicals Inc.) 0.02 g
- Dye obtained by converting counter ion in Victoria Pure Blue BOH into 1-naphthalenesulfonic acid anion 0.04 g
- Methyl ethyl ketone 10 g
- Methanol 7 g
- 15 • 2-Methoxy-1-propanol 10 g

20

25

30

35

40

45

50

55

Table 1

	Substrate	Polymerization Initiator	Infrared absorber	Addition-Polymerizable compound	Blinder	Dyeing solution	Sensitivity (mJ/cm ²)	Printing endurance		Sensitivity (mJ/cm ²)	Printing endurance
Example 1	A	I-1	DX-1	M-1	B-1	DP-4	70	180	Example 54	60	195
Example 2	B	II-8	DX-1	M-2	B-2	DN-3C	85	165	Example 55	75	170
Example 3	C	II-9	DX-2	M-2	B-1	DP-4	80	170	Example 56	75	175
Example 4	A	II-20	DX-3	M-1	B-2	DP-4	80	170	Example 57	70	180
Example 5	B	I-25	DX-1	M-2	B-3	DP-4	85	165	Example 58	80	175
Example 6	C	I-12	DX-1	M-2	B-1	DP-4	80	165	Example 59	70	180
Example 7	A	II-15	DX-2	M-1	B-1	DN-3C	75	175	Example 60	65	190
Example 8	B	III-11	DX-1	M-1	B-2	DN-3C	75	170	Example 61	65	190
Example 9	C	II-36	DX-2	M-2	B-2	DP-4	80	165	Example 62	80	175
Example 10	A	III-14	DX-2	M-2	B-2	DN-3C	90	160	Example 63	85	170
Example 11	B	I-17	DX-2	M-1	B-1	DN-3C	70	180	Example 64	60	190
Example 12	C	II-24	DX-3	M-1	B-3	DP-4	70	175	Example 65	65	185
Example 13	A	II-26	DX-3	M-2	B-3	DP-4	80	165	Example 66	70	175
Example 14	B	III-1	DX-2	M-2	B-2	DN-3C	85	165	Example 67	75	175
Example 15	C	II-27	DX-3	M-1	B-1	DP-4	75	175	Example 68	65	185
Example 16	A	III-0	DX-2	M-1	B-3	DN-3C	85	160	Example 69	75	170
Example 17	B	III-17	DX-1	M-1	B-3	DP-4	85	165	Example 70	75	175
Comparative Example 1	A	H-1	DX-1	M-1	B-1	DP-4	140	100	Comparative Example 13	175	110
Comparative Example 2	A	II-5	DX-3	M-1	B-2	DP-4	No image formation	No image formation	Comparative Example 14	No image formation	No image formation
Comparative Example 3	B	II-3	DX-1	M-1	B-2	DN-3C	125	110	Comparative Example 15	120	
Example 4	C	H-4	DX-2	M-1	B-1	DN-3C	125	115	Comparative Example 16	115	


Table 2

Substrate	Polymerization initiator	Addition-polymerizable compound	Binder	Infrared absorber	Development solution	Sensitivity	Printing endurance	Sensitivity	Printing endurance	
Example 18	IVA-1	M-1	B-1	DX-1	DP-4	90	180	Example 71	80	190
Example 19	IVA-32	M-2	B-2	DX-1	DP-4	85	190	Example 72	80	200
Example 20	IVB-6	M-2	B-1	DX-2	DP-4	100	165	Example 73	75	170
Example 21	SA-36	M-1	B-2	DX-3	DP-4	90	175	Example 74	70	190
Example 22	SH-12	M-2	B-3	DX-1	DP-4	85	170	Example 75	70	190
Example 23	IVB-23	M-2	B-1	DX-1	DP-4	85	175	Example 76	70	195
Example 24	IVC-5	M-1	B-1	DX-2	DN-3C	90	160	Example 77	75	170
Example 25	IVE-7	M-1	B-2	DX-1	DN-3C	10	145	Example 78	100	155
Example 26	IVP-4	M-1	B-1	DX-1	DN-3C	90	180	Example 79	85	190
Example 27	IVO-17	M-2	B-2	DX-2	DN-3C	85	175	Example 80	75	190
Example 28	IVH-4	M-1	B-1	DX-1	DN-3C	95	160	Example 81	85	170
Example 29	IVB-14	M-1	B-3	DX-3	DP-4	80	190	Example 82	65	205
Example 30	IVB-1	M-2	B-2	DX-1	DN-3C	85	190	Example 83	75	200
Example 31	SA-28	M-1	B-1	DX-2	DN-3C	80	175	Example 84	70	200
Example 32	SA-17	M-1	B-1	DX-2	DN-3C	110	155	Example 85	105	165
Example 33	SB-1	M-2	B-1	DX-3	DN-3C	80	180	Example 86	65	200
Example 34	SH-14	M-2	B-2	DX-1	DN-3C	85	180	Example 87	75	190
Example 35	SC-8	M-1	B-3	DX-2	DN-3C	85	180	Example 88	70	195
Example 36	SD-2	M-2	B-1	DX-1	DN-3C	85	175	Example 89	75	190
Example 37	SG-1	M-2	B-3	DX-3	DP-4	105	15	Example 90	90	170
Example 38	SE-2	M-1	B-2	DX-3	DN-3C	95	160	Example 91	85	175
Comparative Example 5	H-1	M-2	B-1	DX-2	DP-4	140	100	Comparative Example 17	125	110
Comparative Example 6	H-2	M-1	B-2	DX-1	DN-3C	125	90	Comparative Example 18	120	95
Comparative Example 7	H-3	M-1	B-1	DX-1	DP-4	125	110	Comparative Example 19	120	120
Comparative Example 8	H-4	M-2	B-2	DX-2	DN-3	120	115	Comparative Example 20	115	115


Table 3

	Substrate	Polymerization initiator	Infrared absorber	Addition-polymerizable compound	Binder	Development solution	Sensitivity (mJ/cm ²)	Printing endurance		Sensitivity (mJ/cm ²)	Printing endurance
Example 39	A	II-1	DX-1	M-1	B-1	DP-4	90	160	Example 92	80	180
Example 40	B	II-4	DX-1	M-2	B-2	DN-3C	90	155	Example 93	80	170
Example 41	C	II-15	DX-2	M-2	B-1	DP-4	100	155	Example 94	95	175
Example 42	A	II-10	DX-3	M-1	B-2	DP-4	85	170	Example 95	75	190
Example 43	D	II-18	DX-1	M-2	B-3	DP-4	105	155	Example 96	95	170
Example 44	C	II-26	DX-1	M-2	B-1	DP-4	95	160	Example 97	90	180
Example 45	A	II-27	DX-2	M-1	B-1	DN-3C	90	160	Example 98	85	180
Example 46	B	II-1	DX-1	M-1	B-2	DN-3C	90	160	Example 99	85	175
Example 47	C	II-3	DX-2	M-2	B-2	DP-4	90	165	Example 100	80	185
Example 48	A	II-6	DX-2	M-2	B-2	DN-3C	85	170	Example 101	75	190
Example 49	B	II-9	DX-1	M-1	B-1	DN-3C	105	150	Example 102	100	170
Example 50	C	II-11	DX-3	M-1	B-3	DP-4	100	160	Example 103	95	175
Example 51	A	II-1	DX-4	M-1	B-2	DP-4	65	180	Example 104	55	200
Example 52	B	II-1	DX-4	M-1	B-2	DN-3C	80	165	Example 105	75	190
Example 53	A	SA-28	DX-4	M-1	B-1	DP-4	75	185	Example 106	70	205
Comparative Example 9	A	II-1	DX-1	M-1	B-1	DP-4	140	100	Comparative Example 21	125	110
Comparative Example 10	A	II-2	DX-3	M-1	B-2	DP-4	125	90	Comparative Example 22	120	95
Comparative Example 11	B	II-3	DX-1	M-1	B-2	DN-3C	125	110	Comparative Example 23	120	120
Example 12	C	II-4	DX-2	M-2	B-2	DP-4	120	115	Comparative Example 24	115	115


DX-1

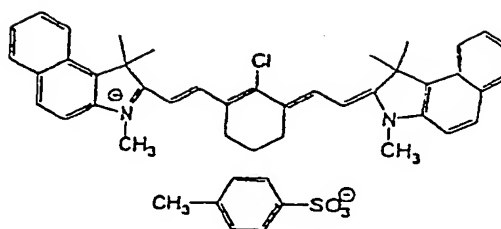


DX-2

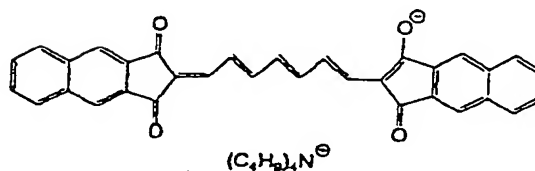

DX-3

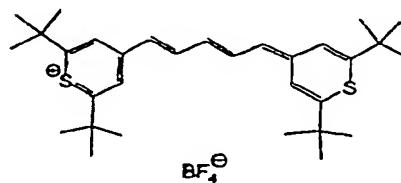

DX-4

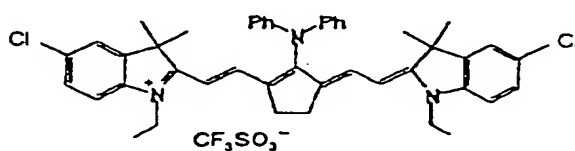

Addition polymerizable compounds in Tables 1 to 3

(M-1)

[0225] Pentaerythritol tetraacrylate

(M-2)

[0226] Glycerin dimethacrylate hexamethylene diisocyanate urethane prepolymer

(Binders in Tables 1 to 3)

(B-1)

[0227] Allyl methacrylate/methacrylic acid/N-isopropylamide copolymer (copolymerization molar ratio: 67/13/20)

[0228] Acid value (measured by NaOH titration): 1.15 meq/g

[0229] Polymerization average molecular weight: 130000

(B-2)

[0230] Allyl methacrylate/methacrylic acid copolymer (copolymerization molar ratio: 83/17)

[0231] Acid value (measured by NaOH titration): 1.55 meq/g

[0232] Polymerization average molecular weight: 125000






(B-3)

[0233] Polyurethane resin which is condensate of the following diisocyanate with diol

- 5 (a) 4,4'-Diphenylmethane diisocyanate
 (b) Hexamethylene diisocyanate
 (c) Polypropylene glycol (polymerization average molecular weight: 1000)
 (d) 2,2-Bis(hydroxymethyl)propionic acid
 ((a)/(b)/(c)/(d) copolymerization molar ratio: 40/10/15/35)
 10 Acid value (measurement by NaOH titration): 1.05 meq/g
 Polymerization average molecular weight: 45000

Comparative Examples 1 to 12

15 [0234] For comparison, on the substrate [A], substrate [B] or substrate [C], photosensitive layers were formed by using photosensitive layer application solutions using known radical polymerization initiators having in a counter anion an onium salt structure other than those represented by the above-described formula, for example known radical polymerization initiators H-1 to H-5 having sulfonate ($-\text{SO}_3^-$) as a counter anion (structures are as shown below), and containing other components of compositions as shown in Tables 1 to 3, to obtain planographic printing plates (Comparative Examples 1 to 12).

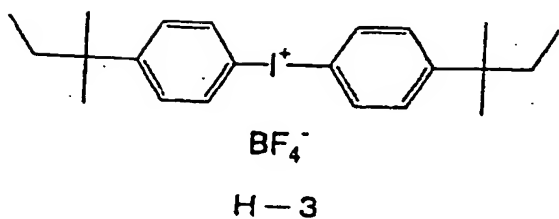

Exposure and Development

55 [0235] The obtained planographic printing plates were exposed using semiconductor laser having an output of 500 mW, a wavelength of 830 nm and a beam diameter of 17 μm ($1/e^2$) at a main scanning rate of 5 m/sec., then, development was conducted using an automatic developing machine (manufactured by Fuji Photo Film Co., Ltd.: trade name "PS Processor 900 VR") charged with DN3C developer (trade name) or DP-4 developer (trade name) and lines liquid FR-3 (1:7) (trade name, manufactured by Fuji Photo Film Co., Ltd.), and the following evaluations were conducted. In the development treatments, kinds of developer used are also listed in the above-mentioned Tables 1 to 3 together.

Printing endurance test

[0236] R 201 (trade name, manufactured by Roland Corp.) was used as a printer, and GEOS (N) (trade name, manufactured by Dainippon Ink & Chemicals Inc.) was used as the ink. Printed products at solid image portions were observed, and printing endurance was measured based on the number of sheets manifesting initiation of fading. The printing endurance was represented by relative ratio based on 100 which is the numerical value (number of pieces) in Comparative Example 1. The evaluation is such that when the number is higher, printing endurance is more excellent.

Evaluation of sensitivity

[0237] Planographic printing plates were exposed by semiconductor laser emitting infrared ray having a wavelength from 830 to 850 nm. After exposure, the plates were developed with DN-3C (trade name, a developer manufactured by Fuji Photo Film Co., Ltd.) diluted with water at a ratio of 1:2 or DP-4 (trade name, a developer manufactured by Fuji Photo Film Co., Ltd.) diluted with water at a ratio of 1:8, and then washed with water. The amount of energy required for recording was calculated based on the line width of an image, laser output, loss in an optical system, and scanning rate, obtained in the above-mentioned procedure. The smaller numerical value represents higher sensitivity.

[0238] The evaluation results are shown in Tables 1 to 3.

[0239] The results in Tables 1 to 3 show that the planographic printing plate of the present invention has high resistance in an alkali developer at the image portions, has excellent printing endurance ability, and has high sensitivity. On the other hand, the planographic printing plates in Comparative Examples 1, 3, 4 to 12 using known radical polymerization initiators are poorer both in printing endurance and sensitivity, as compared with those in Examples 1, 8, 11, 20, 25, 18, 27, 41, 46, 39 and 48 obtained under the same conditions except that polymerization initiators are different. In Comparative Example 2 where a compound having in a counter anion a carboxylate having a structure not belonging to the scope of the present invention was used, no image was formed.

Examples 54 to 106, Comparative Examples 13 to 24

[0240] On the photosensitive layers of the planographic printing plates obtained in Examples 1 to 53 and Comparative Examples 1 to 12, a 3 wt% aqueous solution of polyvinyl alcohol (saponification degree: 98 mol%, polymerization degree: 550) was applied so that the amount applied after drying was 2 g/m², and dried at 100°C for 2 minutes, to obtain planographic printing plates comprising protective layers provided on photosensitive layers. These plates correspond to Examples 54 to 106 and

Comparative Examples 13 to 24.

[0241] The obtained planographic printing plates were subjected to exposure and development under the same conditions as in the above-described Examples 1 to 53 and Comparative Examples 1 to 12 to produce planographic printed plates, and color remaining on non-image portions and close adherence and printing endurance of image portions were evaluated in a similar manner. The results are shown in Tables 1 to 3.

[0242] The results in Tables 1 to 3 show that even when protective layers are provided on photosensitive layers, the same tendency as in Examples 1 to 53 having no protective layer is found, and the planographic printing plates of the present invention have resistance against an alkali developer in image portions, are excellent in printing endurance ability, and have high sensitivity, and further, that by providing a protective layer, both of sensitivity and printing endurance are further improved. Examples 107 to 109

[0243] On polytetraethylene terephthalate films (thickness: 0.1 mm) as a substrate, recording layer application solutions as described below were applied so that the application amount after drying was 2.0 g/cm², to obtain Examples 107 to 109 which are transparent recording materials. In Example 107, I-1 was used, in Example 108, SB-1 was used, and in Example 109, ii-10 was used, respectively, as an acid/radical generating agent.

[0244] The composition of the recording layer application solution is as described below.

- Addition polymerizable compound (M-1) 2.0 g
- Binder (B-1) 1.6 g
- Acid/radical generating agent 0.4 g
- Methyl ethyl ketone 10 g
- Methanol 5 g
- 2-Methoxy-1-propanol 10 g

[0245] This recording material was heated at 200°C for 15 seconds to thermally set the recording layer on the sub-

strate. Then, the recording material was immersed in dimethylsulfoxide for 5 minutes, and the insolubility of this recording layer was calculated from the amount of the remaining recording layer to show an insolubility of 97%. From this, it was confirmed that the recording layer composed of the heat-sensitive composition of the present invention containing the acid/radical generating agent of the general formulae (A) to (E) was hardened successfully.

Comparative Examples 25 to 28

[0246] Recording layers were thermally set in the same manners as in Examples 107 to 109 using radical generating agent having SbF_6^- as a counter cation, instead of the radical generators in the above-mentioned recording layer application solutions, and the insolubilities were measured. As a result, about 14% insolubilized rate was manifested in all the example. By comparison of radical generating agents having the same anion parts, it was recognized that the heat-sensitive composition of the present invention is excellent in sensitivity.

Examples 110 to 112

[0247] On polytetraethylene terephthalate films (thickness: 0.1 mm) as a substrate, recording layer application solutions as described below were applied so that the application amount after drying was 2.0 g/cm^2 , to obtain pale yellow transparent recording materials. In Example 110, II-1 was used, in Example 111, SA-1 was used, and in Example 112, iii-2 was used, respectively, as an acid/radical generating agent.

Recording layer application solution

[0248]

- Oxidative color developing dye (Leuco Crystal Violet) 0.2 g
- Binder (polymethyl methacrylate) 2.7 g
- Acid/radical generating agent 0.3 g
- Methyl ethyl ketone 10 g
- Methanol 8 g
- 2-Methoxy-1-propanol 8 g

[0249] These recording materials were heated in an oven at 200°C for 15 second to heat the recording layers on the substrates to develop color. In all cases, the recording layer developed sharp blue color. From this is it estimated that the recording layer composed of the heat-sensitive composition of the present invention which contains the acid/radical generating agent of the general formulae (A) to (E) includes a leuco dye which is oxidized and develops color due to generation of radicals.


[0250] In the heat-sensitive composition of the present invention highly sensitive irreversible changes of physical properties due to heating are possible. Further in the negative planographic printing plate using this heat-sensitive composition, writing by infrared layers is possible, and image portions have excellent alkali developer resistance. It is also excellent in printing durability and has high sensitivity.

Claims


1. A heat-sensitive composition comprising (I) a compound which generates an acid or a radical when heated and which has the following general formula (A), general formula (B), general formula (C), general formula (D) or general formula (E), and (II) a compound whose physical and chemical properties are changed irreversibly by an acid or radical



General formula (A)




General formula (B)



General formula (C)











General formula (D)



General formula (E)

wherein, in general formula (A), ${}^a\text{M}^+$ represents a monovalent cation; ${}^a\text{X}$ represents one of the groups shown below or a halogen atom;




and in the formula, R^1 and R^2 may be the same or different and represent a monovalent non-metal atom, in the general formula (B), ${}^b\text{Y}$ has the same definition as for ${}^a\text{X}$ in the general formula (A) or represents $-\text{OH}$, $-\text{CN}$, $-\text{NO}_2$, $-\text{Si}(\text{R}^5)(\text{R}^6)(\text{R}^7)$; R^3 to R^7 may be the same or different and represent a monovalent non-metal atom; and ${}^b\text{M}^+$ represents a monovalent cation,

in the general formula (C), R^8 represents a monovalent non-metal atom; Ar^1 and Ar^2 may be the same or different and represent an aryl group; and ${}^c\text{M}^+$ represents a monovalent cation,

in the general formula (D), ${}^d\text{R}$ represents an alkyl group or aryl group; and ${}^d\text{M}^+$ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium,


in the general formula (E), ${}^e\text{X}^-$ is an anion of a compound having a structure of the following general formula (F);




General formula (F)

in the formula, FY represents a single bond, -CO- or -SO₂-; each of R^a and R^b independently represents a linear, branched or cyclic alkyl group, aryl group, aralkyl group or camphor group; R^a and R^b may be connected via an alkylene group, arylene group or aralkyl group to form a ring; when FY is a -CO- group, R^b may be a hydroxyl group or alkoxy group; and, ^aM⁺ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium.


2. The heat-sensitive composition according to Claim 1, wherein, the composition further comprises (III) a light-heat converting agent, and by exposure in the absorption wavelength of said (III) light-heat converting agent, an acid or radical of a compound (I) generating an acid or radical by being heated which is represented by at least one of the above-mentioned general formulae (A) to general formula (E) is generated, and there are change in physical or chemical properties are changed irreversibly of a compound (II) whose physical or chemical properties by an acid or radical.
3. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (A), and wherein R¹ and R² in said formula (A) are independently selected from the group consisting of an alkyl group, an alkenyl group and an aryl group having 1 to 12 carbon atoms.
4. The heat-sensitive composition according to claim 1, wherein ^aM⁺ is selected from the group consisting of Li⁺, Na⁺, K⁺, ammonium, iodonium, and sulfonium.
5. The heat-sensitive composition according to claim 1, wherein ^aM⁺ in said formula (A) is represented by the following general formula (^aM-I) or (^aM-II);

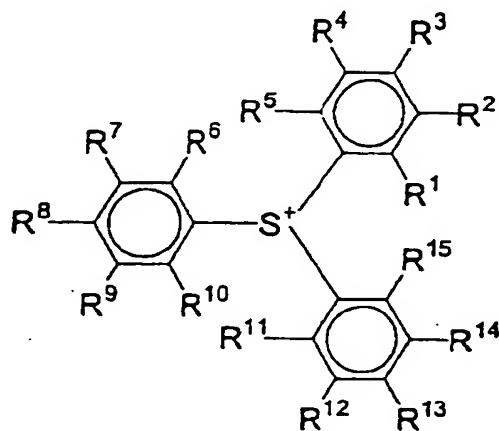(^aM - I)

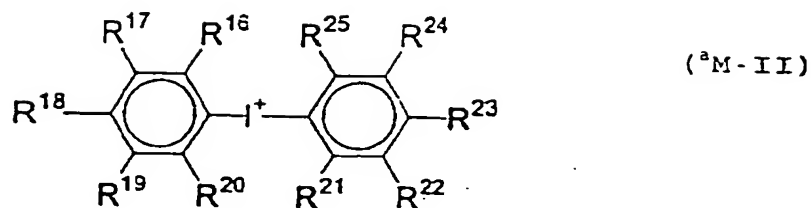


15 wherein, in the above formulae (^aM-I) and (^aM-II), R¹ to R²⁵ independently represent a hydrogen atom, a linear, branched or cyclic alkyl group, a linear, branched or cyclic alkoxy group, a hydrogen atom or a -S-R²⁶ group, wherein R²⁶ represents a linear, branched or cyclic alkyl group.

- 20 6. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (A) in which ^aX has the following structure:




- 30 7. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (B) in which ^bY has one of the following structures:

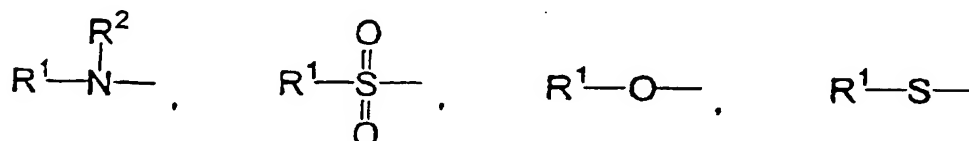


- 40 8. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (C), and wherein R⁸ in said formula (C) is selected from the group consisting of a halogen atom, an alkyl group having 1 to 6 carbon atoms, an aryl group having 6 to 10 carbon atoms or a hydroxyl group.
- 45 9. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (D), and wherein ^dR-COOH, that is a conjugate acid of the carboxylate ^dR-COO⁻ of said formula (D), has a pKa in water of 2 or more.
- 50 10. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by said formula (E), wherein in said formula (E), ^eX⁻ is an anion of a compound having a structure of said formula (F), and wherein in said formula (F), ^fY comprises -CO- or -SO₂-.
- 55 11. A heat mode-applicable negative planographic printing plate comprising a substrate on which is disposed a photosensitive layer comprising (I) an acid or radical polymerization initiator represented by at least one of the following general formula (A), general formula (B), general formula (C), general formula (D) and general formula (E), (II-a) a radical-polymerizable compound having an unsaturated bond (III) a light-heat converting agent, and (IV) a binder polymer:



General formula (A)




General formula (B)



General formula (C)












General formula (D)




General formula (E)

wherein, in general formula (A), ${}^a\text{M}^+$ represents a monovalent cation; ${}^a\text{X}$ represents one of the groups shown below or a halogen atom;





and in the above formula, R^1 and R^2 may be the same or different and represent a monovalent non-metal atom, in the general formula (B), ${}^b\text{Y}$ has the same definition as for ${}^a\text{X}$ in the general formula (A) or represents $-\text{OH}$, $-\text{CN}$, $-\text{NO}_2$, $-\text{Si}(\text{R}^5)(\text{R}^6)(\text{R}^7)$; R^3 to R^7 may be the same or different and represent a monovalent non-metal atom; and ${}^b\text{M}^+$ represents a monovalent cation, in the general formula (C), R^8 represents a monovalent non-metal atom; Ar^1 and Ar^2 may be the same or different and represent an aryl group; and ${}^c\text{M}^+$ represents a monovalent cation, in the general formula (D), ${}^d\text{R}$ represents an alkyl group or aryl group; and ${}^d\text{M}^+$ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium, in the general formula (E), ${}^e\text{X}^-$ is an anion of a compound having a structure of the following general formula (F);



General formula (F)

in the formula, FY represents a single bond, -CO- or -SO₂-; each of R^a and R^b independently represents a linear, branched or cyclic alkyl group, aryl group, aralkyl group or camphor group; R^a and R^b may be connected via an alkylene group, arylene group or aralkyl group to form a ring; when FY is a -CO- group, R^b may be a hydroxyl group or alkoxy group; and, ^aM⁺ represents a counter cation selected from the group consisting of sulfonium, iodonium, diazonium, ammonium and azinium.


12. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (A), and wherein R¹ and R² in said formula (A) are independently selected from the group consisting of an alkyl group, an alkenyl group and an aryl group having 1 to 12 carbon atoms.
13. The heat-sensitive composition according to claim 11, wherein ^aM⁺ is selected from the group consisting of Li⁺, Na⁺, K⁺, ammonium, iodonium, and sulfonium.
14. The heat-sensitive composition according to claim 11, wherein ^aM⁺ in said formula (A) is represented by the following general formula (^aM-I) or (^aM-II) ;

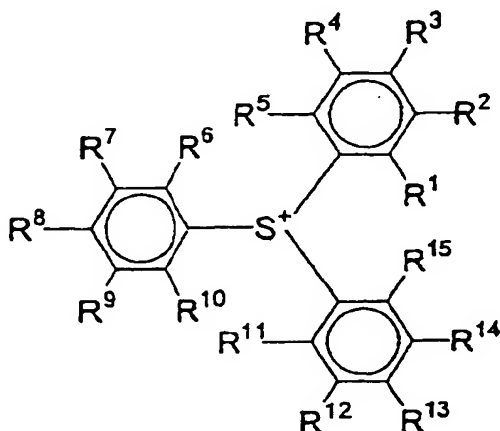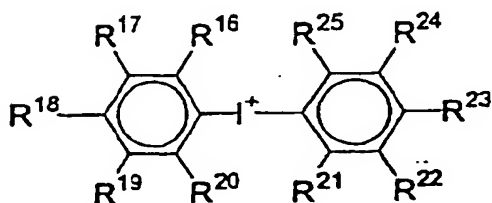(^aM - I)(^aM - II)


wherein, in the above formulae (^aM-I) and (^aM-II), R¹ to R²⁵ independently represent a hydrogen atom, a linear, branched or cyclic alkyl group, a linear, branched or cyclic alkoxy group, a hydrogen atom or a -S-R²⁵ group,

wherein R^{26} represents a linear, branched or cyclic alkyl group.

15. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (A) in which aX has the following structure:



16. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (B) in which bY has one of the following structures:




17. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (C), and wherein R^8 in said formula (C) is selected from the group consisting of a halogen atom, an alkyl group having 1 to 6 carbon atoms, an aryl group having 6 to 10 carbon atoms or a hydroxyl group.

18. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (D), and wherein $^dR\text{-COOH}$, that is a conjugate acid of the carboxylate $^dR\text{-COO}^-$ of said formula (D), has a pK_a in water of 2 or more.

19. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by said formula (E), wherein in said formula (E), $^eX^-$ is an anion of a compound having a structure of said formula (F), and wherein in said formula (F), fY comprises -CO- or $\text{-SO}_2\text{-}$.

20. The heat-sensitive composition according to claim 1, wherein said compound (I) is represented by the following formula (I-a);

(I - a)

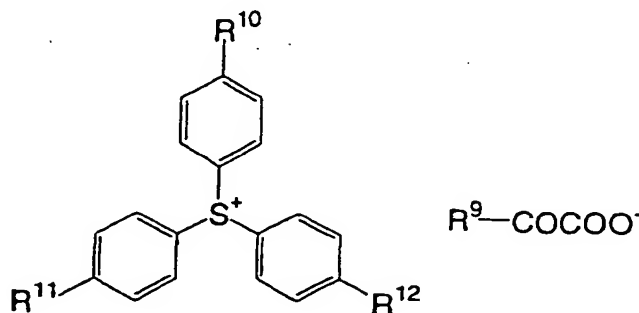


wherein, R^9 represents a phenyl group or an alkyl group having 1 to 4 carbon atom(s); and R^{10} , R^{11} and R^{12} independently represents a halogen atom, methyl group, chloro group or buthyl group.

21. The heat-sensitive composition according to claim 11, wherein said compound (I) is represented by the following

formula (I-a);

(I-a)

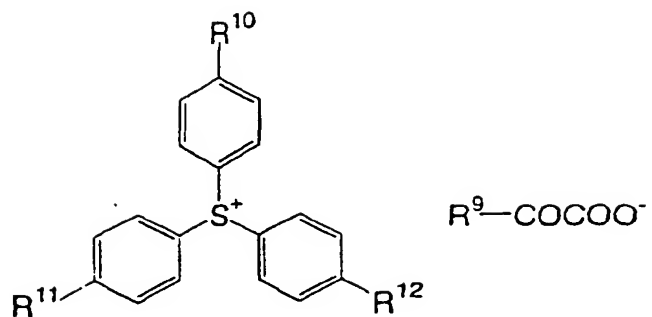

wherein, R⁹ represents a phenyl group or an alkyl group having 1 to 4 carbon atom(s); and R¹⁰, R¹¹ and R¹² independently represents a halogen atom, methyl group, chloro group or buthyl group.

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 160 095 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
03.12.2003 Bulletin 2003/49

(51) Int Cl.7: **B41M 5/36, B41C 1/10,**
G03F 7/00, G03F 7/029

(43) Date of publication A2:
05.12.2001 Bulletin 2001/49

(21) Application number: **01112829.5**

(22) Date of filing: **30.05.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **30.05.2000 JP 2000160323**
20.06.2000 JP 2000184603
04.09.2000 JP 2000266797

(71) Applicant: **FUJI PHOTO FILM CO., LTD.**
Kanagawa-ken (JP)

(72) Inventors:
• **Shimada, Kazuto**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)
• **Sorori, Tadahiro**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)
• **Kodama, Kunihiko**
Yoshida-cho, Haibara-gun, Shizuoka-ken (JP)

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **Heat-sensitive composition and planographic printing plate precursor**

(57) A heat-sensitive composition comprising a compound of a specific general formula which generates an acid or radical when heated, and a compound whose physical and chemical properties are irreversibly changed by an acid or radical.

EP 1 160 095 A3



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention shall be considered, for the purposes of subsequent proceedings, as the European search report

EP 01 11 2829

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 06, 30 June 1997 (1997-06-30) -& JP. 09. 034110 A (KONICA CORP), 7 February 1997 (1997-02-07) * abstract * * page 5; examples *	1,11	B41M5/36 B41C1/10 G03F7/00 G03F7/029
A	US 5 853 958 A (GIUDICE ANTHONY C ET AL) 29 December 1998 (1998-12-29) * column 9, line 45 - line 55 * * examples *	1,11	
A	US 5 607 816 A (KEARNEY FREDERICK R ET AL) 4 March 1997 (1997-03-04) * column 8, line 60 - column 9, line 4 * * the whole document *	1,11	
P,A	EP 1 096 315 A (FUJI PHOTO FILM CO LTD) 2 May 2001 (2001-05-02) * the whole document *	1,11	
			TECHNICAL FIELDS SEARCHED (IntCl.7)
			G03F B41M B41C
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
THE HAGUE		10 October 2003	Heywood, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPD FORM 1503 03 02 (P04C07)



European Patent
Office

INCOMPLETE SEARCH
SHEET C

Application Number
EP 01 11 2829

Claim(s) searched completely:
11-14

Claim(s) searched incompletely:
1-10

Reason for the limitation of the search:

Present claims 1-10 relate to a composition containing I) one of a compound A of general formula A,B,C,D or E and II) a compound defined by reference to a desirable characteristic or property, namely a compound whose physical and chemical properties are changed irreversibly by an acid or radical".

The application provides support within the meaning of Article 84 EPC and/or disclosure within the meaning of Article 83 EPC for only a very limited number of compounds whose physical and chemical properties are changed irreversibly by an acid or radical. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Independent of the above reasoning, the claims also lack clarity (Article 84 EPC). An attempt is made to define the compound, within a composition, by reference to a result to be achieved. Again, this lack of clarity in the present case is such as to render a meaningful search over the whole of the claimed scope impossible. Consequently, the search has been carried out for those parts of the claims which appear to be clear, supported and disclosed, namely those parts relating to the compositions which contain a radical-polymerizable compound having an unsaturated bond.



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number
EP 01 11 2829

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
E	EP 1 110 747 A (FUJI PHOTO FILM CO LTD) 27 June 2001 (2001-06-27) * examples *	1,11	
E	EP 1 176 007 A (FUJI PHOTO FILM CO LTD) 30 January 2002 (2002-01-30) * page 18; claims *	1,11	
E	EP 1 182 033 A (FUJI PHOTO FILM CO LTD) 27 February 2002 (2002-02-27) * page 55; claims * * paragraphs '0293!', '0294! *	1,11	
E	EP 1 136 281 A (FUJI PHOTO FILM CO LTD) 26 September 2001 (2001-09-26) * paragraphs '0481!', '0483! *	1,11	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
E	EP 1 182 032 A (FUJI PHOTO FILM CO LTD) 27 February 2002 (2002-02-27) * paragraph '0208!; claims *	1,11	
E	EP 1 170 123 A (FUJI PHOTO FILM CO LTD) 9 January 2002 (2002-01-09) * paragraph '0186! *	1,11	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 2829

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 09034110	A	07-02-1997	NONE	
US 5853958	A	29-12-1998	US 5616449 A	01-04-1997
US 5607816	A	04-03-1997	NONE	
EP 1096315	A	02-05-2001	JP 2001125260 A	11-05-2001
			JP 2001133969 A	18-05-2001
			EP 1096315 A1	02-05-2001
			US 6566035 B1	20-05-2003
EP 1110747	A	27-06-2001	JP 2001175004 A	29-06-2001
			EP 1110747 A1	27-06-2001
			US 2002033109 A1	21-03-2002
EP 1176007	A	30-01-2002	JP 2002040638 A	06-02-2002
			CN 1334490 A	06-02-2002
			EP 1176007 A2	30-01-2002
			US 2002045128 A1	18-04-2002
EP 1182033	A	27-02-2002	JP 2002062648 A	28-02-2002
			JP 2002229207 A	14-08-2002
			EP 1182033 A1	27-02-2002
			US 2003008239 A1	09-01-2003
EP 1136281	A	26-09-2001	JP 2001337460 A	07-12-2001
			EP 1136281 A1	26-09-2001
EP 1182032	A	27-02-2002	JP 2002072462 A	12-03-2002
			EP 1182032 A2	27-02-2002
			US 2002048722 A1	25-04-2002
EP 1170123	A	09-01-2002	JP 2002023350 A	23-01-2002
			EP 1170123 A2	09-01-2002
			US 2003073032 A1	17-04-2003

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82